

# Emailing Reports

When producing reports via the TapeTrack Command Line Interface programs, you may wish to send these reports via an email attachment.

This can be achieved using the following methods:

1. Via a command line SMTP agent such as [blat](#) or mailx.
2. Via the Send Email action of Windows Scheduler.
3. Via the TapeTrack SMTP PowerShell script.


## The TapeTrack SMTP PowerShell Script

The TapeTrack SMTP PowerShell Script allows files to be sent to one or more users via SMTP. The script is installed as part of the TapeTrack Server Utilities Package.

### Enabling Signed Scripts

The TapeTrack SMTP PowerShell Script is digitally signed with GazillaByte's code signing certificate, but by default Windows disallows the invocation of all PowerShell scripts.

To enable signed scripts, open Windows PowerShell as the Windows Administrator.

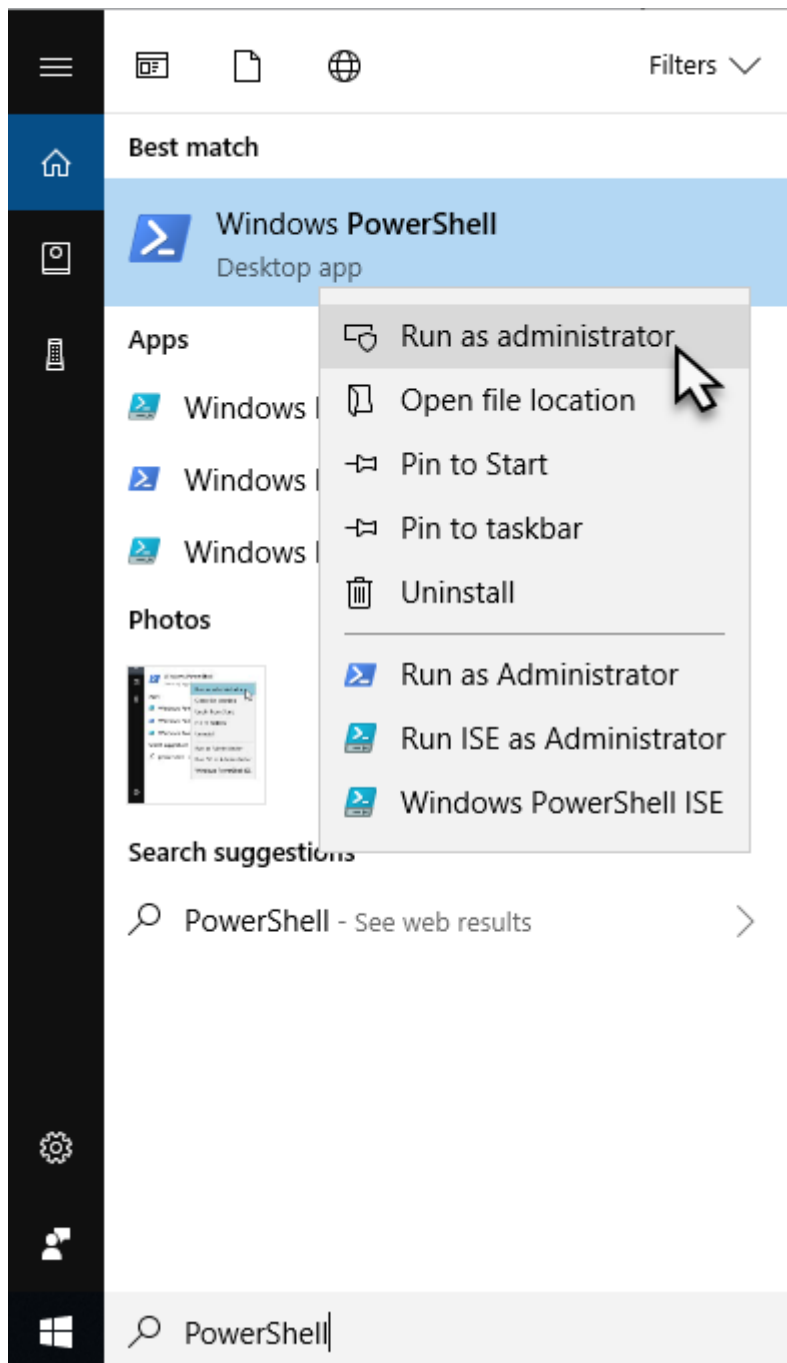

Run the command `Set-ExecutionPolicy RemoteSigned`

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) 2016 Microsoft Corporation. All rights reserved.

PS C:\WINDOWS\system32> Set-ExecutionPolicy RemoteSigned

Execution Policy Change
The execution policy helps protect you from scripts that you do not trust. Changing the execution policy might expose
you to the security risks described in the about_Execution_Policies help topic at
http://go.microsoft.com/fwlink/?LinkID=135170. Do you want to change the execution policy?
[Y] Yes [A] Yes to All [N] No [L] No to All [S] Suspend [?] Help (default is "N"): Y
PS C:\WINDOWS\system32>
```

## Command Line Arguments

The PowerShell script takes the following arguments:

- config The path to the configuration file.
- smtpserver The IP address or name of the SMTP Server.
- smtpport SMTP Server port.
- smtpuser User-id of the user used to authenticate on the SMTP Server.
- smtppw Password of the user used to authenticate on the SMTP Server.
- smtpssl This enables SSL encryption for the email if required by the SMTP Server.

```
Powershell.exe -File TMSSSMTP.ps1 -smtpuser tapetrack@gazillabyte.com -smtppw mypassword -smtpssl
```

## Configuration File

The Configuration File instructs the script what to send, who to send it to, and who to send it from.

The file consists of records that contain a control character, followed by an argument. The control character must be in the first byte of each record.

- F From (1 only)
- T To (1 or more)
- C CC (1 or more)
- S Subject (1 only)
- B Body text (1 or more)
- A path to attachment file (1 or more)
- . comment.

```
Fsomebody@gazillabyte.com
Tsomebody@gazillabyte.com
Csomebodyelse@gazillabyte.com
BPlease see attached file.
BTo change who receives this email please edit the email.cfg file used by
TMSSEmail.ps1
Ainventory.txt
SInventory Report
```

## Examples

### Email Scratch Report

```
TMSS10Inventory -S batch:-batch@gazillabyte.tapetrack.com -V "*.*.*@*+Z" >report.txt
PowerShell -config scratch.cfg -server smtp.tapetrack.com -port 25
```

From:

<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

[https://rtfm.tapetrack.com/cli/emailing\\_reports](https://rtfm.tapetrack.com/cli/emailing_reports)

Last update: **2025/01/21 22:07**

