

# Technical Note: Configuration File

Modifying config file in TapeMaster and Lite to remove slot display.



This modification alters the way TapeMaster and/or Lite display the slotted volumes location. It is also a local modification, which means it only affects the local installation of TapeMaster and Lite, so will need to be executed on all local machines you want to alter the display on.

As it is a local modification it has no effect on the data stored in the database.

To modify TapeMaster, open TMSSMaster.cfg in a plain text editor such as Notepad. TMSSMaster.cfg can be found in the TapeTrack/TapeMaster install directory (default C:\Program Files\TapeTrack\TapeTrack TapeMaster).

To modify Lite, open TMSSLite.cfg in a plain text editor such as Notepad. TMSSLite.cfg can be found in the TapeTrack/Lite install directory (default C:\Program Files\TapeTrack\TapeTrack Lite).

Locate the section **variables**

```
TMSSMaster.cfg - Notepad
File Edit Format View Help
options = {
    //
    // When exporting data to email send to the following addresses
    //
    email = [ "mailto1@tapetrack.com", "mailto2@tapetrack.com" ];

    /*
    variables = {
        TMSSLEVELNAMES = "A,B,C";
    };
    */

    showparent = true;
};

defaults = {
```

Remove comment tags /\* & \*/ from above and below variables.


Change the line of code  
TMSSLEVELNAMES = "A,B,C";  
to  
TMSSNOLEVELSLOT = "true";

```
TMSSMaster.cfg - Notepad
File Edit Format View Help
options = {
  //
  // When exporting data to email send to the following addresses
  //
  email = [ "mailto1@tapetrack.com", "mailto2@tapetrack.com" ];

  variables = {
    TMSSNOLEVELSLOT = "true";
  };

  showparent = true;
};
defaults = {
```


and save file

 Make sure that you have sufficient rights to save file to directory and to save as TMSS10Master.cfg or TMSSLite.cfg and not as a text file.

To check the modification was successful:

Login to TapeMaster and open slotted media to check display of volume location is now restricted to Zone and shelf as illustrated by the images below..

Before modification - TapeMaster displaying Zone, shelf and slot.

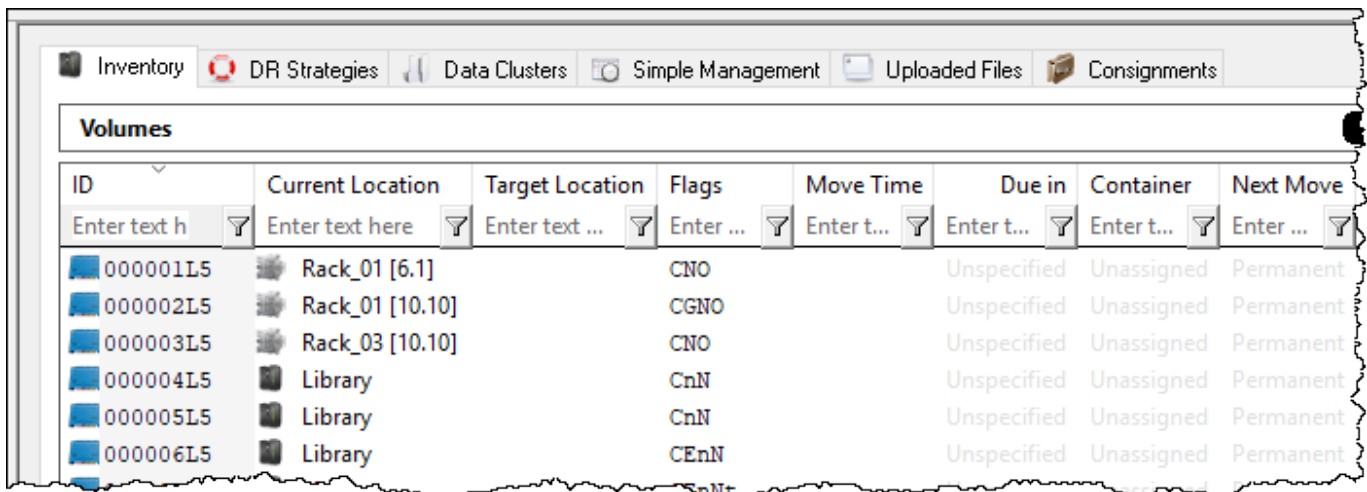

ID	Current Location	Target Location	Flags	Move Time	Due in	Container	Next Move
000001L5	Rack_01 [6.1]		CNO		Unspecified	Unassigned	Permanent
000002L5	Rack_01 [10.10]		CGNO		Unspecified	Unassigned	Permanent
000003L5	Rack_03 [10.10]		CNO		Unspecified	Unassigned	Permanent
000004L5	Library		CnN		Unspecified	Unassigned	Permanent
000005L5	Library		CnN		Unspecified	Unassigned	Permanent
000006L5	Library		CEnN		Unspecified	Unassigned	Permanent

After modification - TapeMaster displaying Zone and shelf only.

ID	Current Location	Target Location	Flags	Move Time	Due in	Container	Next Move
000001L5	Rack_01 [6]		CNO		Unspecified	Unassigned	Permanent
000002L5	Rack_01 [10]		CGNO		Unspecified	Unassigned	Permanent
000003L5	Rack_03 [10]		CNO		Unspecified	Unassigned	Permanent
000004L5	Library		CnN		Unspecified	Unassigned	Permanent
000005L5	Library		CnN		Unspecified	Unassigned	Permanent
000006L5	Library		CEnN		Unspecified	Unassigned	Permanent

From:  
<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:  
[https://rtfm.tapetrack.com/technote/config\\_file?rev=1528945539](https://rtfm.tapetrack.com/technote/config_file?rev=1528945539)

Last update: **2025/01/21 22:07**

