

Labelling Gemtrac Racks

Why Label The Gemtracs

Labelling the Gemtrac racks in the following manner allows the configuration of TapeTrack allowing operators to quickly locate a Slotted tape, or locate a specified Slot to place a tape in.

With TapeTrack Zones and Slotting information configured correctly, each Slot will be referenced with the Zone-ID, Shelf number and Slot number in the format of **Zone-ID Shelf#.Slot#**.

For example **Red-2 3.16** would be on the third shelf, 16th Slot in drawer Red-2.

Red-4 11.23 would be on the 11th shelf, 23 Slot in the drawer Red-4.

Adding Labels

Each Gemtrac unit comes with a left and right bank of drawers, these get divided into two groups of Zones.

In this example, although all racks and drawers are the same color, we will use Red and Green colors to identify the Zones correctly. In this example, each drawer has 12 shelves and each shelf has 30 Slots.

If you have more cabinets, each drawer is numbered consecutively for the remaining drawers. For example if you had two cabinets, Red would have Zones Red-1 to Red-10, Green would have Zones Green-1 to Green-10.



If you have other cabinets but in separate rows, they would be divided using the same method but using other colors for the additional zones. For example if you had a duplicate setup of cabinets next to the Red & Green Zones you would add the extra Zones as Blue and Yellow.



Focusing on the Red bank, each drawer is identified as a Zone. First drawer would be Red-1, second drawer Red-2 etc. (the Green Zones, the first drawer (opposite Red-1) would be Green-1, second drawer Green-2 etc.)

Start at the end opposing to where you will put any expansion Gemtracs to ensure the new additions are in successive numerical order.

Labels for the Gemtrac drawers are printed onto card stock and placed in the card holders, ensuring the barcode is fully visible and not obstructed by the holder frame for accurate scanning..



Slots numbered starting at 1 for each shelf																														Shelves numbered starting at 1 for each drawer
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	1
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	2
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	3
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	4
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	5
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	6
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	7
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	8
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	9
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	10
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	11
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	12

Shelf number labels (starting at 1 for the top shelf, 2 for the second shelf etc) for each shelf are printed on adhesive labels of an appropriate size and applied directly next to each shelf. Each and every drawer's shelves are labelled starting at 1 for the top shelf.

The above image shows shelves numbered from from 1 (start) to 12 (end). The shelves for the other Zones will be labelled in the exact same manner, from 1 (start) to 12 (end).


Slot numbers are placed on each Shelf, starting at number 1 for each and every shelf.

The above image shows every Slot numbered from 1 (start) to 30 (end). The Slots for the other Zones will be labelled in the exact same manner, starting at number 1 for each and every shelf.


If you don't want to label every Slot on every shelf, other options can be used as long as the operators can accurately identify the required Slots.

Examples for other Slot labelling formats can include:


Every 5th Slot.

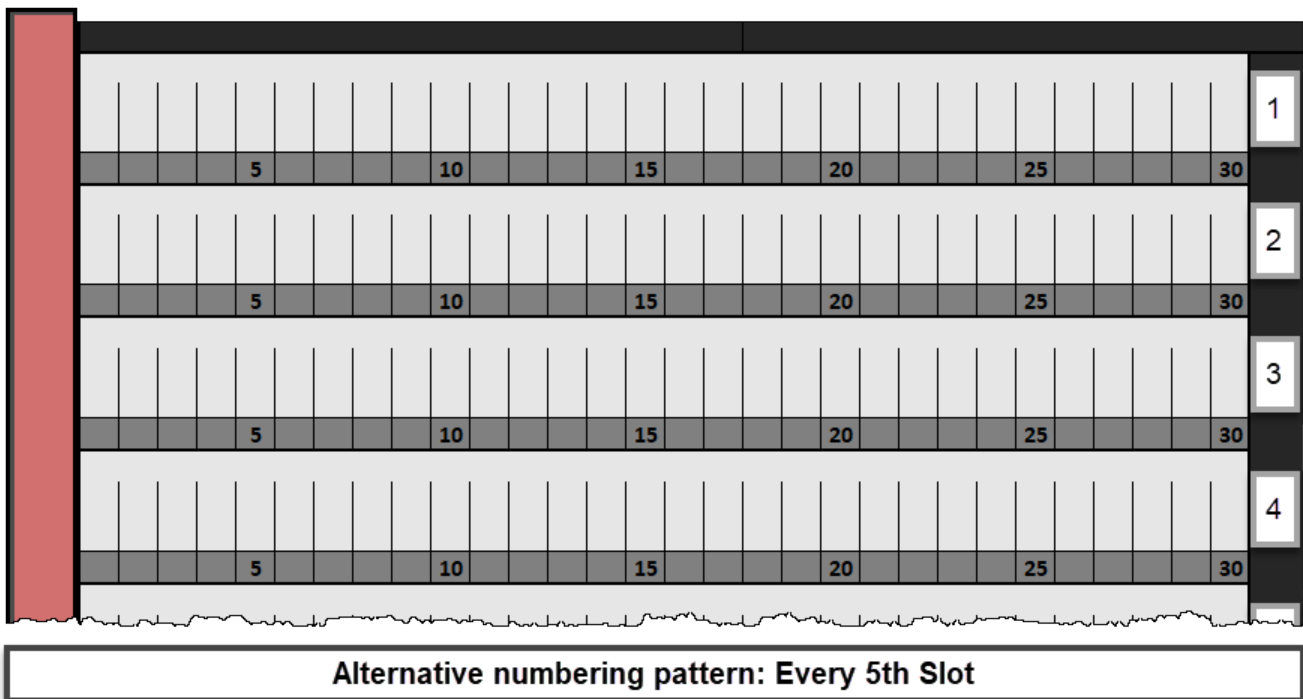

Every 10th Slot.

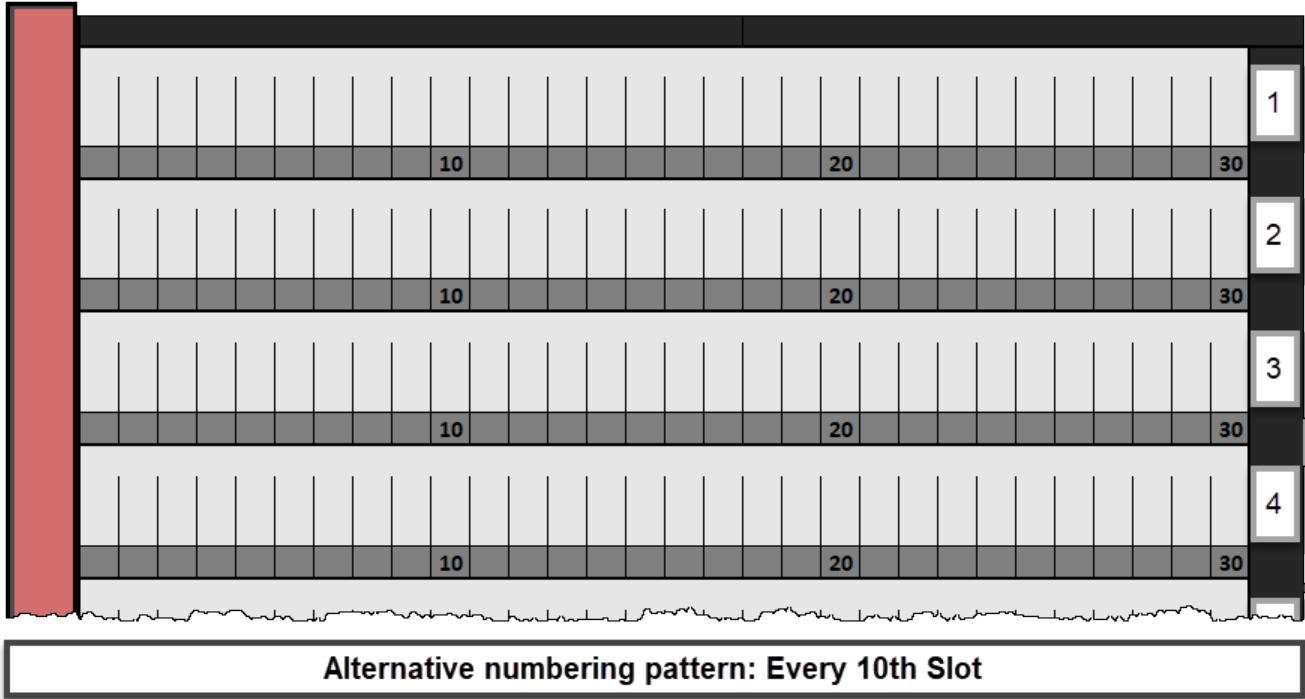


Every alternate shelf.

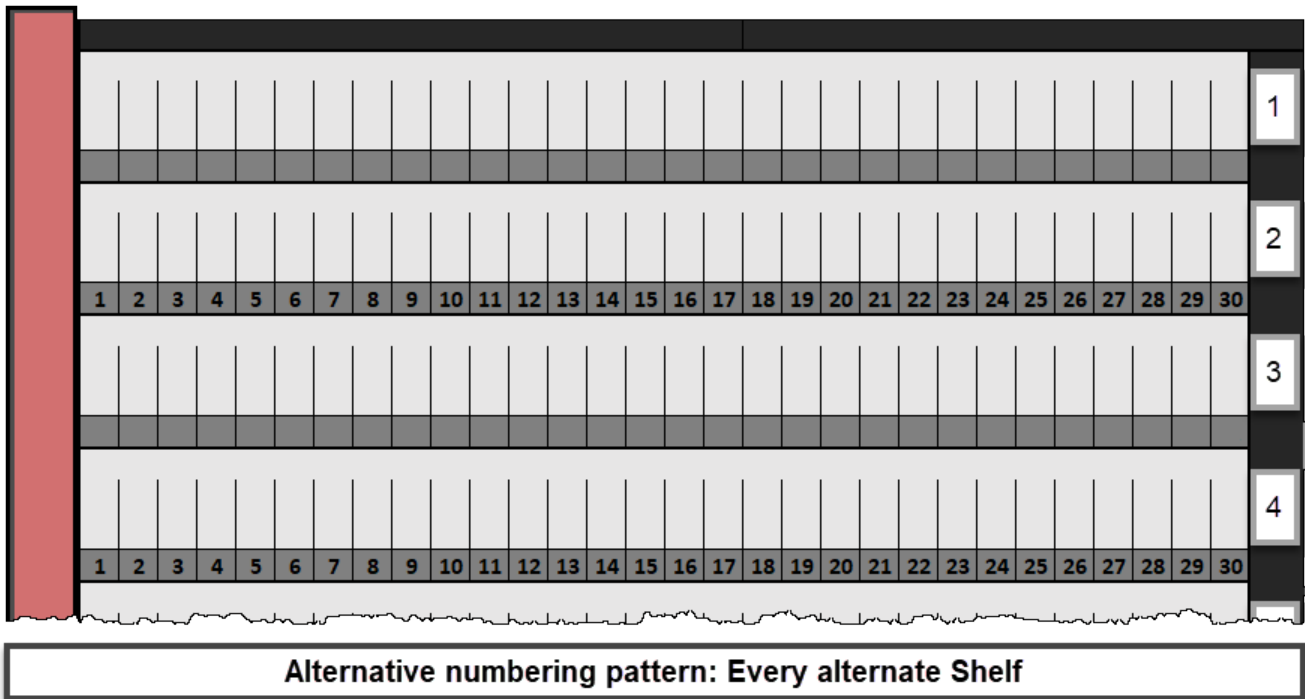

Which format you use is up to personal preference, however it is recommended what ever format you choose that every shelf follows that format to maintain uniformity, ie. either all shelves labelled every Slot or all shelves labelled every 5th Slot and not a mixture of both.

[master](#), [slot](#), [rack](#), [sync](#)



From:
<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:
https://rtfm.tapetrack.com/technote/gemtrac_labels?rev=1635987880

Last update: **2025/01/21 22:07**

