

Slot Numbering

When a [Volume](#) has a slot in TapeTrack, the slot is represented by both a [Virtual Slot](#) and [Physical Slot](#).

When displaying Physical Slot, the slot will either be displayed as a slot, or a level and a slot (when the [Zone](#) the slot belongs to has defined slots per level).


It is possible to change the way a Physical Slot is displayed in TapeTrack Desktop and TapeTrack Batch programs by defining changes in the [Configuration File](#).

Changing Physical Slot Representation

Masking the Slot

The display in [TapeTrack TapeMaster](#) and [TapeTrack Lite](#) can be modified to mask the Slot number of the [Volumes](#), displaying [Zone](#) and Shelf only. This can be useful storing [Volumes](#) in drawers with a limited number of Slots, allowing librarians to Slot the [Volumes](#) quickly in a [Zones](#) shelf location without needing to adhere to a Slot Number.

No Slot Masking - [TapeTrack TapeMaster](#) displaying [Zone](#), shelf and Slot (in the format **Zone_ID [shelf_number.slot_number]**).

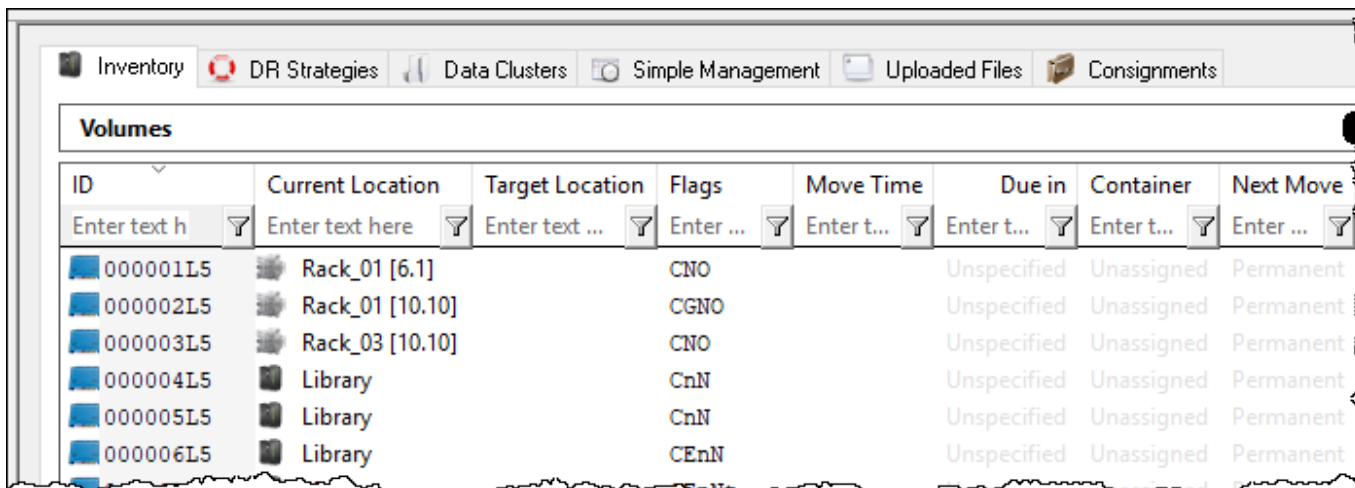

ID	Current Location	Target Location	Flags	Move Time	Due in	Container	Next Move
000001L5	Rack_01 [6.1]		CNO		Unspecified	Unassigned	Permanent
000002L5	Rack_01 [10.10]		CGNO		Unspecified	Unassigned	Permanent
000003L5	Rack_03 [10.10]		CNO		Unspecified	Unassigned	Permanent
000004L5	Library		CnN		Unspecified	Unassigned	Permanent
000005L5	Library		CnN		Unspecified	Unassigned	Permanent
000006L5	Library		CEnN		Unspecified	Unassigned	Permanent

Slot Masking - [TapeTrack TapeMaster](#) displaying [Zone](#) and shelf only (in the format **Zone_ID [shelf_number]**).

ID	Current Location	Target Location	Flags	Move Time	Due in	Container	Next Move
000001L5	Rack_01 [6]		CNO		Unspecified	Unassigned	Permanent
000002L5	Rack_01 [10]		CGNO		Unspecified	Unassigned	Permanent
000003L5	Rack_03 [10]		CNO		Unspecified	Unassigned	Permanent
000004L5	Library		CnN		Unspecified	Unassigned	Permanent
000005L5	Library		CnN		Unspecified	Unassigned	Permanent
000006L5	Library		CEnN		Unspecified	Unassigned	Permanent

Further information and instructions on [masking Slots](#) can be found [here](#)

Changing The Level

When creating (or editing) a storage [Zone](#) for [Volumes](#) you have the ability to specify not only the number of Slots but the number of Slots per level or Shelf. This enables TapeTrack to display the location of a [Volume](#) by [Zone](#), Shelf and Slot number.

If you prefer Shelf levels to be displayed alphabetically, or any other string values, this can be achieved via the desktop software configuration file.

Setting Shelf Name Values

Open the configuration file, found in the desktop installation directory (eg TapeMaster default installation directory `TapeTrack/Tapemaster/TMSSMaster.cfg`, Lite default installation `TapeTrack/Tapemaster/TMSSLite.cfg`) in a text editor such as Notepad.

- Uncomment (remove `/*` above and `*/` below) the code block `variables = { TMSSEVELNAMES="A,B,C"; };`
- Set the Shelf names as required, default is level 1 = A, level 2 = B and level 3 = C.
- Add any extra Shelf names if required, for example if you have 10 Shelves `TMSSEVELNAMES="A,B,C,D,E,F,G,H,I,J";`
- Save file, ensuring it is saved with the extension `.cfg` and not `.txt`
- Restart your desktop software and check the change is effected correctly

Example

TapeTrack [TapeTrack TapeMaster](#) display with [Zone](#) set to 10 slots per Shelf. Display for [Volume](#) 000001L5 shows in [Zone](#) Rack_01, Shelf 6, Slot 1 (in the format **Zone_ID [shelf_number.slot_number]**). The default display mode shows Shelf allocation numerically.

ID	Current Location	Target Location	Flags	Move Time	Due in	Container	Next Move
000001L5	GT1 [1.1]		CNO		Unspecified	Unassigned	Permanent
000002L5	GT1 [1.2]		CGNO		Unspecified	Unassigned	Permanent
000003L5	GT1 [1.3]		CNO		Unspecified	Unassigned	Permanent
000004L5	GT1 [1.5]		CNO		Unspecified	Unassigned	Permanent
000005L5	Library	Offsite Vault	CMnN	H23:12:17	Unspecified	Unassigned	Permanent
000006L5	Library	Offsite Vault	CEMnN	H23:12:17	Unspecified	Unassigned	Permanent

After alteration to the TMSMaster.cfg to set TMSLEVELNAMES="A,B,C", TapeMaster displays the shelf levels alphabetically, exchanging 1 for A, 2 for B etc.

Display for Volume 000001L5 shows in Zone Rack_01, Shelf A, Slot 1 (in the format **Zone_ID [shelf_number.slot_number]**).

ID	Current Location	Target Location	Flags	Move Time	Due in	Container	Next Move
000001L5	GT1 [A.1]		CNO		Unspecified	Unassigned	Permanent
000002L5	GT1 [A.2]		CGNO		Unspecified	Unassigned	Permanent
000003L5	GT1 [A.3]		CNO		Unspecified	Unassigned	Permanent
000004L5	GT1 [A.5]		CNO		Unspecified	Unassigned	Permanent
000005L5	Library	Offsite Vault	CMnN	H23:03:17	Unspecified	Unassigned	Permanent
000006L5	Library	Offsite Vault	CEMnN	H23:03:17	Unspecified	Unassigned	Permanent

[technote](#), [slotting](#), [zones](#), [tapemaster](#), [config](#)

From: <https://rtfm.tapetrack.com/> - TapeTrack Documentation

Permanent link: https://rtfm.tapetrack.com/technote/slot_numbering?rev=1603854709

Last update: 2025/01/21 22:07

