

# Overview


A Zone is a specific location where Volumes can be Slotted. Most commonly, Zones are shelving units, cabinets, or high-density storage drawers.

You must [create a zone](#) before it can be applied to a repository.


## Associating a Zone with a Repository

Once Zones are set in Zone Administration, they must be added to the appropriate Repository.

Select the Customer and Media type that the zone/s will be applied to.

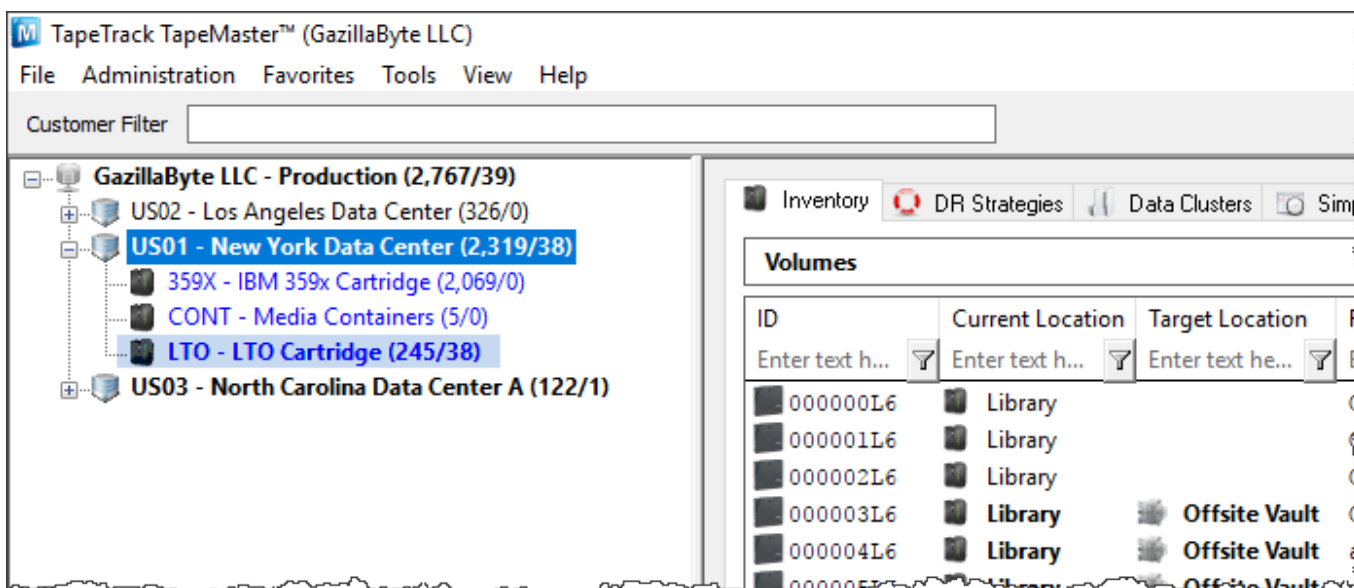

Right click the required repository and select Properties, or double click the repository.

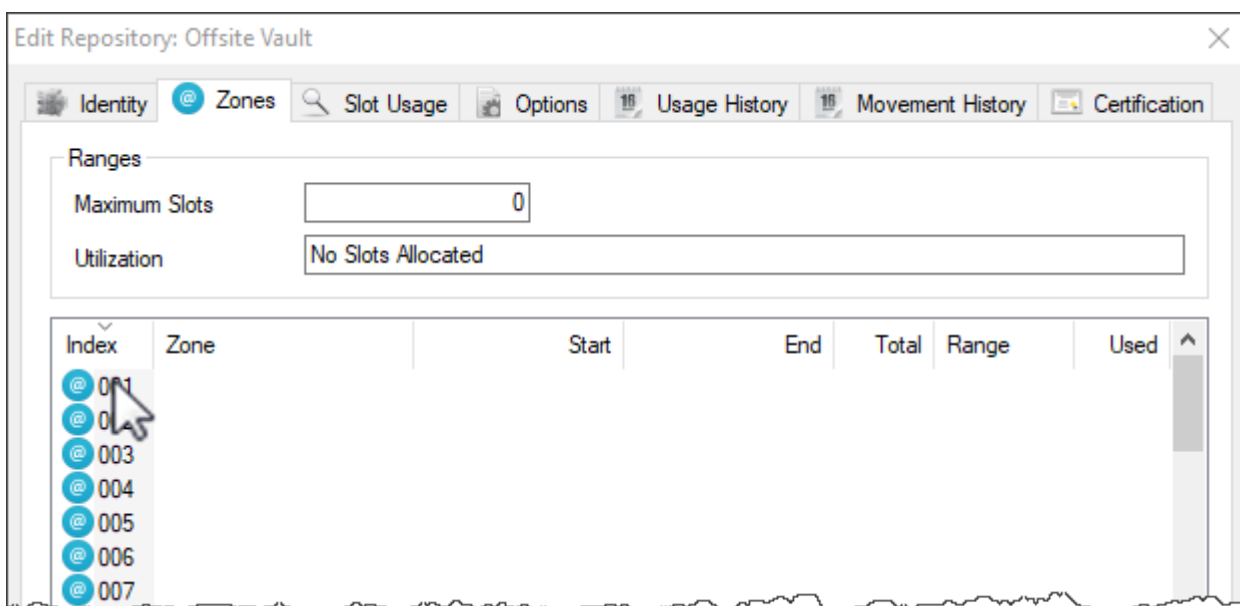

From the drop down list Zone ID select the zone required.

Adjust the slider Slot Ranges to only include the slot allocation required from the zone. Selected slots can be all or adjusted in from either the start or end but must be sequential.

Click OK to save zone allocation.

Multiple zones can be added to a repository, to increase slot capacity, by repeating the process as required.

**Edit Range Information** [X]

Zone Selection

Zone-ID: 0001 GemTrac 1

Slot Start: 1 Level 01, Slot S01

Slot End: 450 Level 10, Slot S45

Slot Total: 450

Slots/Level: 45

Slot Ranges

Start Slot: 1 Level/Slot: 1 1

End Slot: 350 Level/Slot: 8 35

Total Slots: 350

OK Cancel

C-ID	M-ID	R-ID	Start	Slot	End	Slot	Total
US01	LTO	OFFS	Level 01, Slot S01	1	Level 10, Slot S45	450	450

From: <https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link: [https://rtfm.tapetrack.com/master/repository\\_assign\\_zone?rev=1502469116](https://rtfm.tapetrack.com/master/repository_assign_zone?rev=1502469116)

Last update: **2025/01/21 22:07**

