


# Overview

A Zone is a specific location where Volumes can be Slotted. Most commonly, Zones are shelving units, cabinets, or high-density storage drawers. You must [create a zone](#) before it can be applied to a repository.


## Associating a Zone with a Repository

Once Zones are set in [Zone Administration](#), they must be added to the appropriate [Repository](#).

Select the [Customer](#) and [Media type](#) that the zone/s will be applied to.

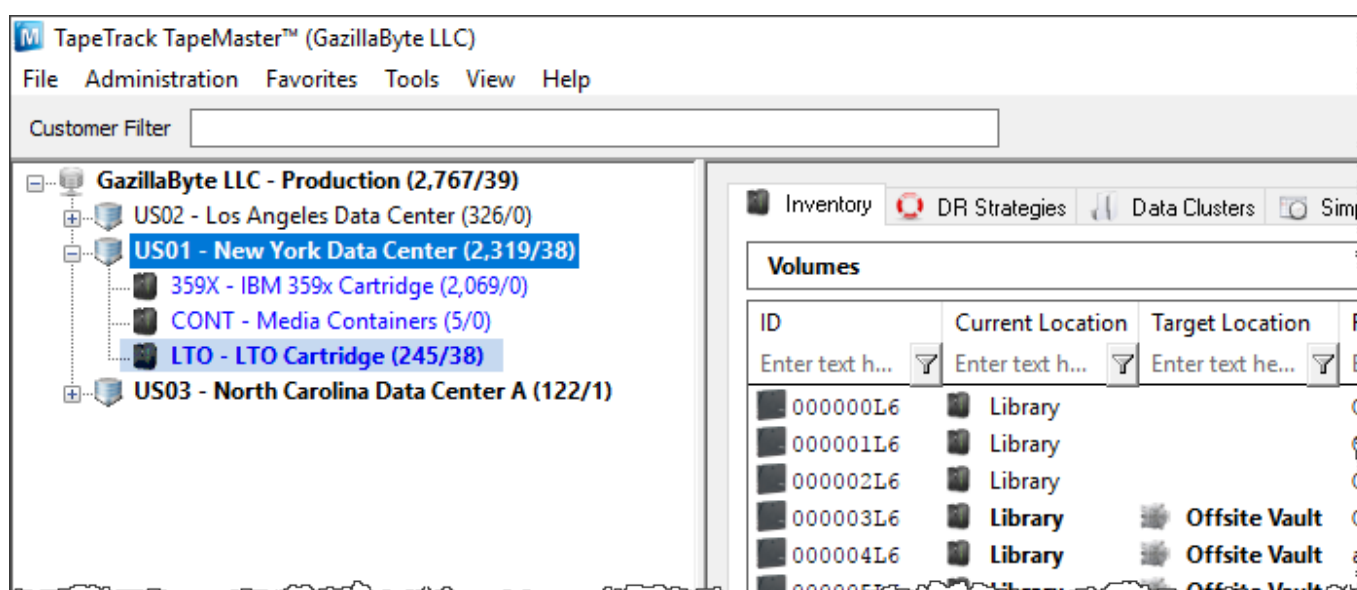

Right click the required repository and select Properties, or double click the repository.

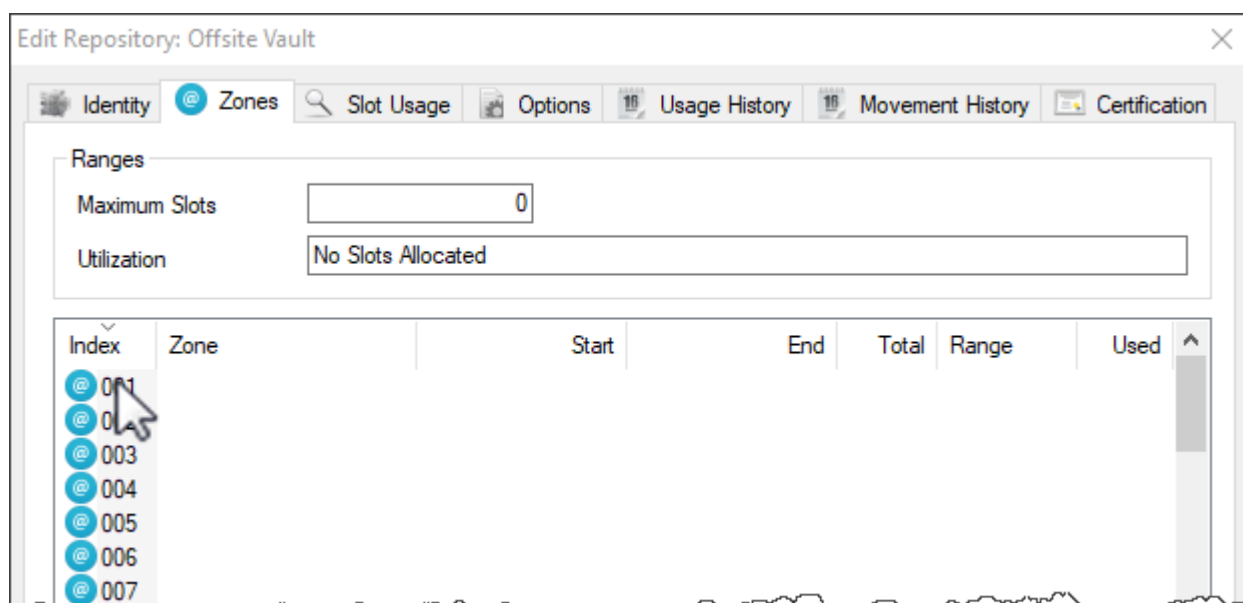

From the drop down list Zone ID select the zone required.

Adjust the slider Slot Ranges to only include the slot allocation required from the zone. Selected slots can be all or adjusted in from either the start or end but must be sequential.

**Edit Range Information** ✕

**Zone Selection**

Zone-ID:   ▼

Slot Start: 1      Level 01, Slot S01

Slot End: 450      Level 10, Slot S45

Slot Total: 450

Slots/Level: 45

**Slot Ranges**

Total Slots: 350

C-ID	M-ID	R-ID	Start	Slot	End	Slot	Total
US01	LTO	OFFS	Level 01, Slot S01	1	Level 10, Slot S45	450	450

Click OK to save zone allocation.

Multiple zones can be added to a repository, to increase slot capacity, by repeating the process as required.

From: <https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link: [https://rtfm.tapetrack.com/master/repository\\_assign\\_zone?rev=1502818045](https://rtfm.tapetrack.com/master/repository_assign_zone?rev=1502818045)

Last update: **2025/01/21 22:07**

