


# Barcode Rule

Barcode rules use a set of defined patterns to parse Scanned Barcodes, enabling TapeTrack to identify Volumes for processing.

## Examples

Barcode Rule Generic `?????.???.*`

Will parse a barcode, matching the pattern 4 characters, period, 3 characters, period and then any characters, into Customer-ID (first 4 characters), Media-ID (characters 6 to 8 inclusive) and Volume-ID (characters 10 onwards).

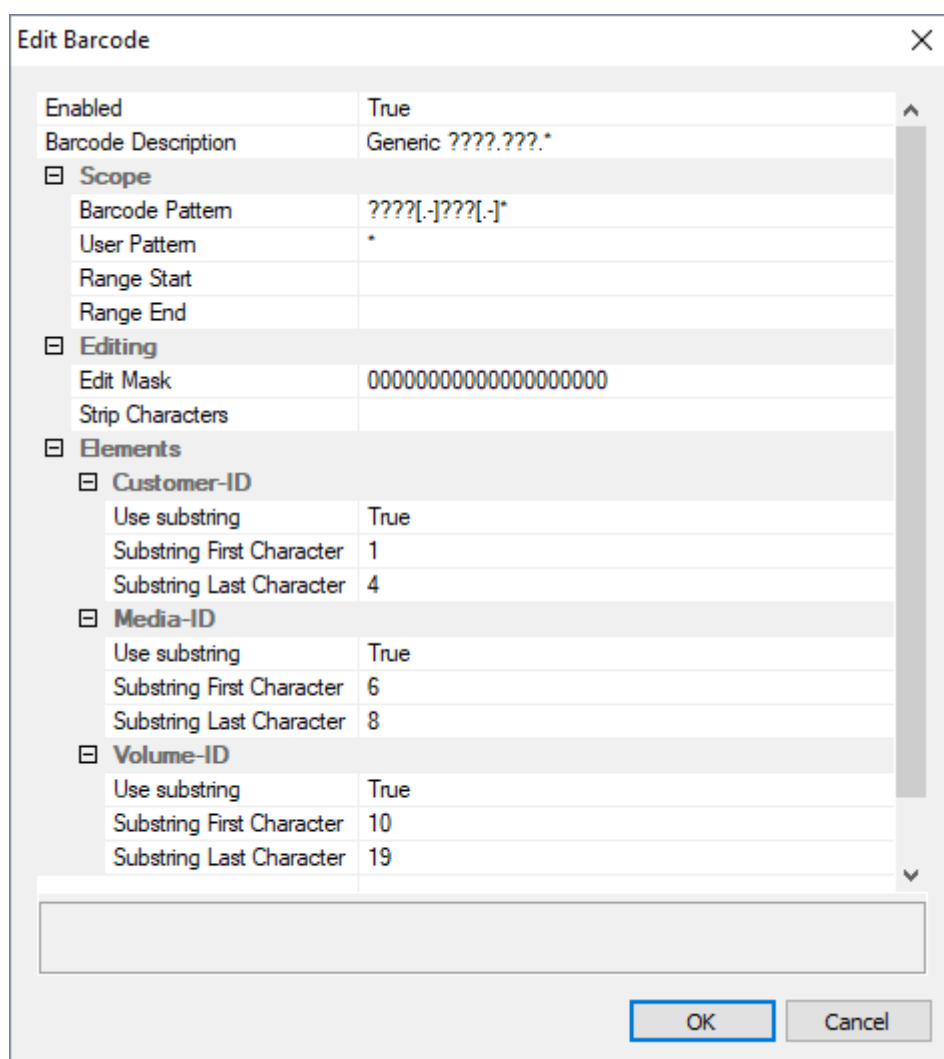

Barcode `US04.LTO.123456L6` will be parsed by the Barcode Rule `Generic ??????.???.*` to:

- Customer-ID `US04`
- Media-ID `LTO`
- Volume-ID `123456L6`



From:  
<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:  
[https://rtfm.tapetrack.com/concepts/barcode\\_rule](https://rtfm.tapetrack.com/concepts/barcode_rule)

Last update: **2025/01/21 22:07**

