Adding a Desktop Server Connection

When using the TapeTrack Desktop Software you will have to have one or more TapeTrack Framework Server entries defined so that you can connect to a server endpoint.

To configure a server you will need the following information:

- 1. The server IP address or DSN name.
- 2. The server port (usually 5000).
- 3. If you are connecting via a HTTP Proxy:
 - The proxy IP address or DNS Name.
 - ∘ The proxy port
 - The proxy user name (if authentication is required)
 - The proxy password (if authentication is required)


This can be done in the following ways:


- 1. Adding a connection interactively.
- 2. Adding a connection to the Configuration File.
- 3. Clicking on a URL.
- 4. Clicking a Windows Registry File.




When using TapeTrack TapeMaster that was installed as part of the TapeTrack Framework Server installation, an entry for localhost will be automatically added by the installer.


Adding a connection interactively

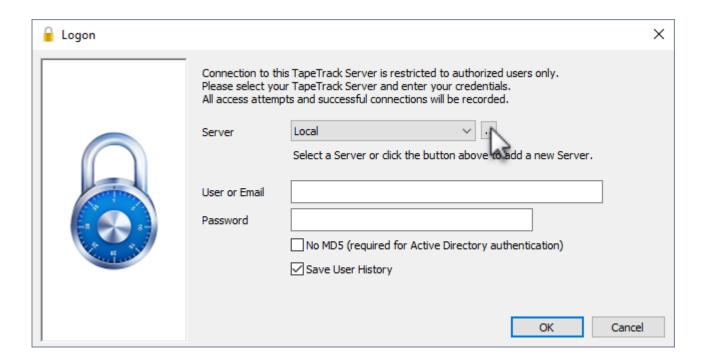

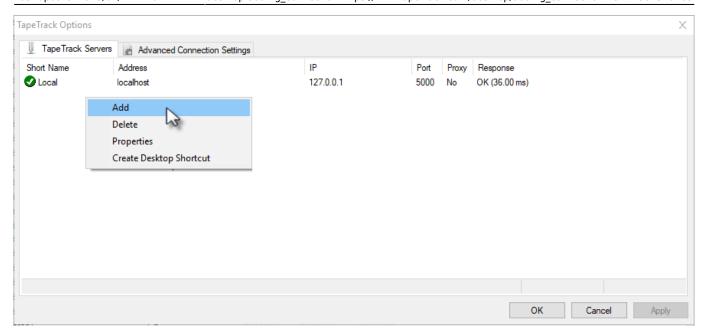

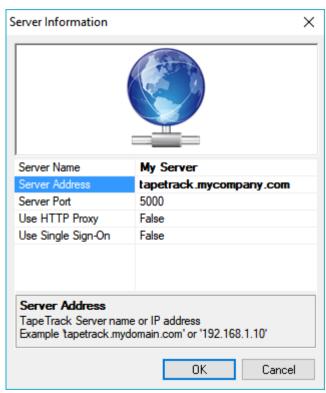

https://rtfm.tapetrack.com/ Printed on 2025/04/12 02:03

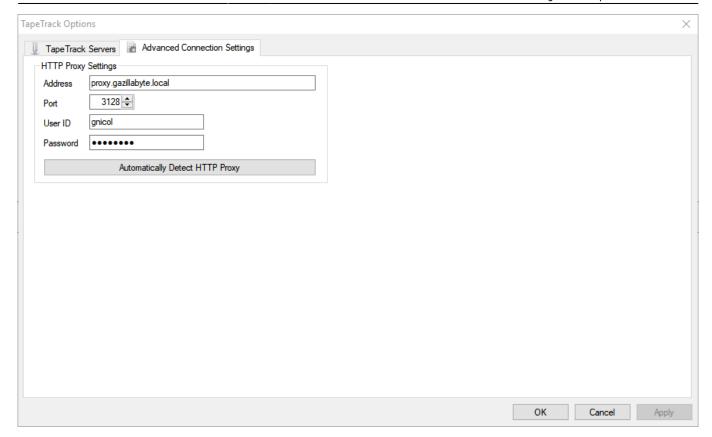



From:

https://rtfm.tapetrack.com/ - TapeTrack Documentation

Permanent link:

https://rtfm.tapetrack.com/desktop/adding_connection?rev=1504540269



