

# Slotting

A Slot is a location in a [Zone](#) large enough for one [Volume](#). Slotting is a process of allocating a [master:volumes|Volume]] to a particular slot to allow documentation of the exact storage location of that [master:volumes|Volume]].


## Adding Slots to a Repository

To add Slots to a [Repository](#), create a [Zone](#) using the Zone Administration tool in the Administration Menu. Then, follow the steps to [Add a Zone](#) to a Repository.

## Manually Add a Volume to a Slot

To manually add a [master:volumes|Volume]] to a Slot, double-click a [Volume](#) in the [master:volumes|Volume]] List or right-click a [Volume](#) in the Volume List and select **Properties**. This will launch the [Volume Properties Window](#).

Select the **Target Location** tab and enter a Slot number in either the **Slot** field in the Relative Location window or the **Level** field and **Slot** field in the Absolute Location window.

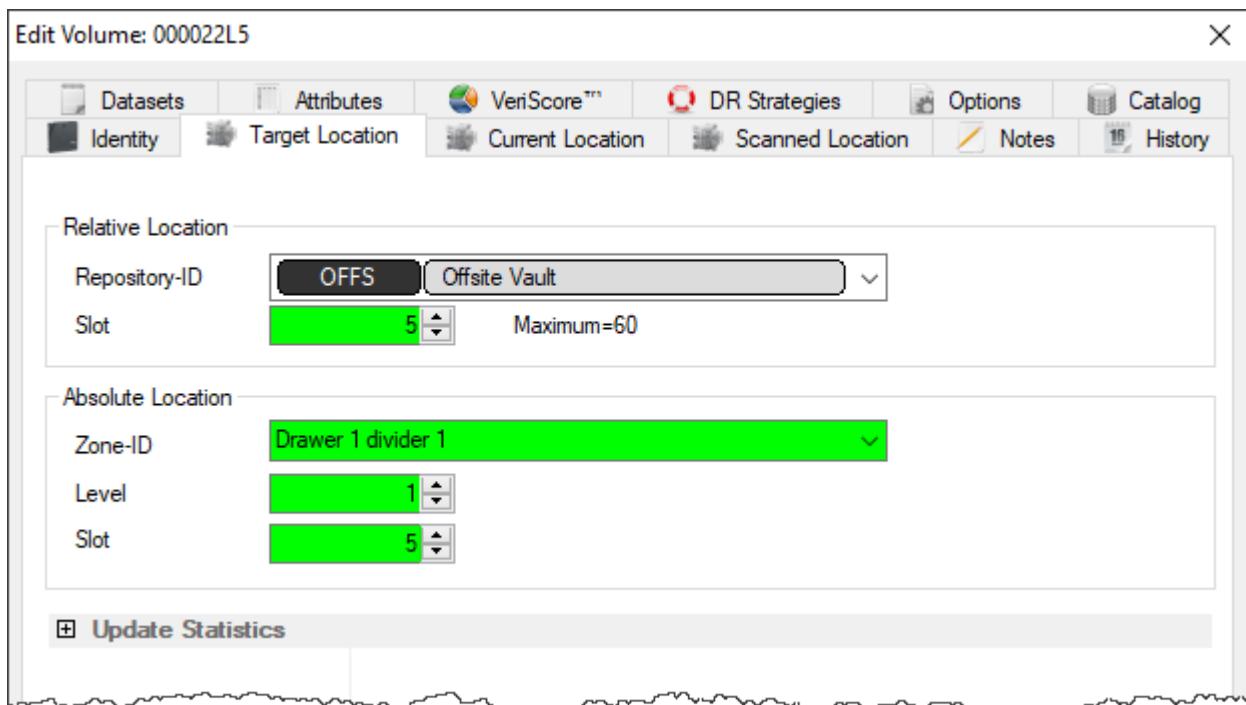

Click Save and the [Volume](#) will be put into a Move to that slot, even if that [Volume](#) is moving to a Slot within its Current [Repository](#).

Press F5 in the inventory window to update the display to show new target slotting.

## Automatic Slotting

Automatic Slotting in TapeTrack is done with a Command Line program called [TMSS10SlotAllocation](#) that is included in installs of [TapeTrack Framework Server](#) and [TapeTrack Server Utilities](#) in conjunction with [Windows Task Scheduler](#).


[TMSS10SlotAllocation](#) must be run on the [TapeTrack Framework Server](#), but it can be launched remotely if necessary.

## Sample Slotting Script

```
TMSS10SlotAllocation -S user:-password@tapetrack.domain.com >
"%TMSS10REPORTS%\slotting_report.txt" 2>
"%TMSS10REPORTS%\slotting_error.txt"
```

## Preparing TapeMaster for Automatic Slotting

Before running [TMSS10SlotAllocation](#), Repositories must be set so that Slotting is Enabled. This can be done under the [Options Tab](#) of the [Repository Properties Window](#).

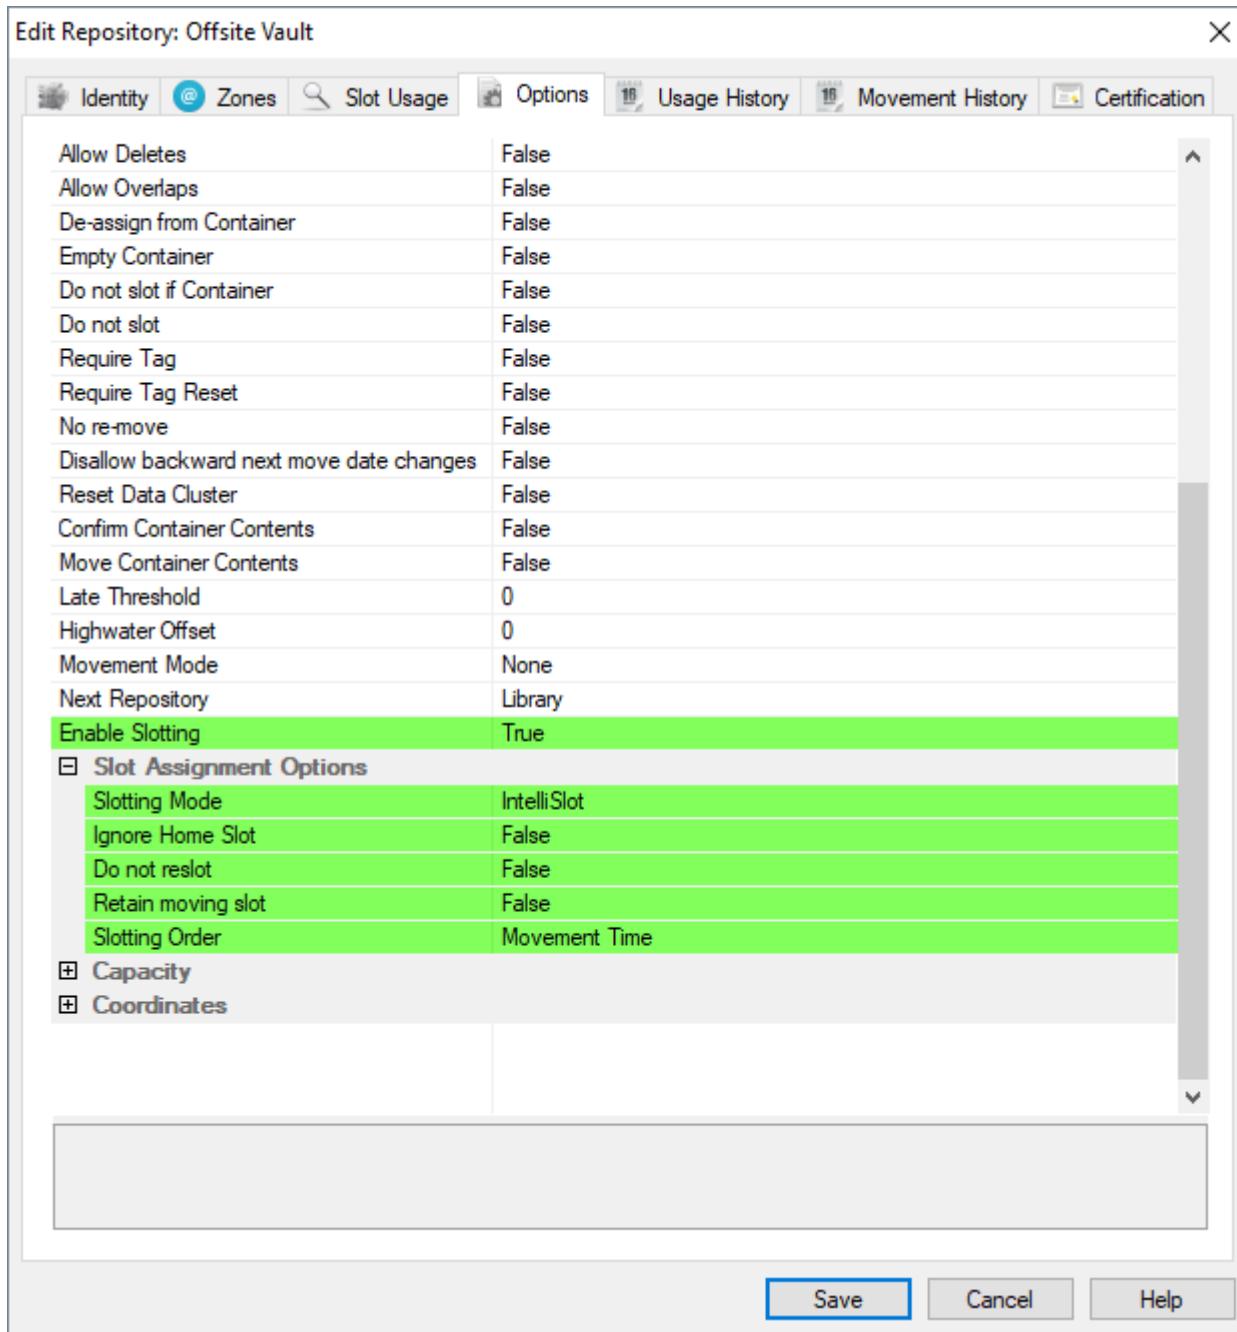

Once **Slotting** is enabled, the slotting Assignment Options can be set.

- **Slotting Mode**

- **IntelliSlot:** The Slotting batch process will Slot [Volumes](#) in groups by Consignment or Slotting Order until the available group slots are filled. At this point, empty Slots will be filled on a First Available Status.
- **First Available:** [Volumes](#) will be put in the first available Slot in their Repository and will not be grouped.
- **Bypass:** When [Volumes](#) are automatically confirmed (see above), they will not be assigned Slots.

- **Ignore Home Slot:** If a Volume has been assigned a Home Slot in the Options Tab of the [Volume Properties Window](#), this Repository will ignore it and Slot using the Slot assignment Options.

- **Do not reslot:** If set to true a [master:volumes|Volume]] will not be reslotted in it's previous slot when it is moved back.

- **Retain moving slot:** If set to true the slot allocation is not made available for other

[master:volumes|Volumes]] until the [master:volumes|Volumes]] moving out is confirmed at target location. False allows the slot to be allocated to another [master:volumes|Volume]] as soon as the occupying [master:volumes|Volume]] is placed in a move status.

- **Slotting Order:** There are three orders with which [master:volumes|Volumes]] may be assigned Slots:

- **Movement Time:** [master:volumes|Volumes]] will be assigned Slots based on when they arrived at the selected Repository.
- **From Location:** [master:volumes|Volumes]] will be assigned Slots based on which Repository they were sent from.
- **Volume-ID:** [master:volumes|Volumes]] will be assigned Slots in the alphanumeric order based on their [master:volumes|Volume-ID's]].

From:

<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**



Permanent link:

<https://rtfm.tapetrack.com/master/slotting?rev=1566186309>

Last update: **2025/01/21 22:07**