

Adding and Maintaining Volumes

Adding Individual Volumes

To add a [Volume](#) either:

- Right-click on a [Media Type](#) and select Add Volume.

The screenshot displays the TapeTrack TapeMaster™ (GazillaByte) application window. The interface includes a menu bar (File, Administration, Favorites, Tools, View, Help) and a Customer Filter. The main area is divided into several sections:

- Inventory:** Shows a tree view on the left with folders like "GazillaByte - Production", "US00 - United State", "US01 - New York", "US02 - Los Angeles", "CONT - Cont...", "LTO - LTO Ca", and "US03 - North Ca".
- Volumes:** A table with columns: ID, Current Location, Target Location, Next Move, and Description. The table is filtered for "Los Angeles Data Center" and "LTO Cartridge".
- Repositories:** A section showing icons for "Gemtrac", "Library", and "Offsite Vault".

ID	Current Location	Target Location	Next Move	Description
000006L6	Library	Offsite Vault...	Friday, Nove...	Monthly
000008L6	Library	Offsite Vault...	Permanent	Weekly
000010L6	Offsite Vault [...]		Permanent	Scratch
000011L6	Offsite Vault [...]		Permanent	Weekly
000012L6	Library		Permanent	Scratch
000013L6	Library		Permanent	Scratch
000014L6	Library	Offsite Vault...	Permanent	Weekly
000015L6	Library		Permanent	Scratch
000016L6	Library		Permanent	Scratch
000017L6	Library		Permanent	Scratch
000018L6	Library		Permanent	Scratch
000019L6	Library		Permanent	Scratch
000020L6	Library	Offsite Vault...	Friday, Dece...	Weekly
000021L6	Library		Permanent	Scratch
000022L6	Library		Permanent	Scratch
000023L6	Library		Permanent	Scratch

At the bottom of the Volumes section, there are summary statistics: Total Items 1,589, Total Selected 1, and First Selection 13.

At the bottom of the interface, a status bar indicates: Connection 127.0.0.1 uses AES 256 bit encryption.

- Right-click in the Inventory window and select Add.



- Click in the Inventory window and press Insert on the keyboard

This will open the Edit New Volume window.

In the Edit New Volume window enter the Volume-ID of the new Volume to be added. Volume-ID's must be unique within a Customer/Media Type scope and must be between 1 and 10 alphanumeric characters long.

Volume Attributes

Customer-ID	US02	Los Angeles Data Center
Media-ID	LTO	LTO Cartridge
Volume-ID		

Save Cancel Help

Click Save to add [Volume](#).


Adding Multiple Volumes

Adding multiple Volumes can be accomplished using several different methods.


- Scanning Volumes using the Scan To Add process, best suited to adding small groups of Volumes with a scanner, keyboard or [GazillaByte CloudScan App](#).
- Pasting in Volumes from Windows Clipboard or file, best suited to adding new Volumes from emailed or file lists of Volume-ID's.
- [Importing Volumes from Excel file](#), best suited to adding Volumes and additional data from Excel sheets.
- Creating Volumes using the [Volume-ID Building](#) tool, .
- Importing Volumes from your Backup Software with TMS10Sync.
 - [Backup Exec](#)
 - [Commvault](#)
 - [Data Protector](#)

- [Netbackup](#)
- [Networker](#)
- [Tivoli Storage Manager](#)
- [VEEAM](#)

Right-Click in the Volume List, navigate to Special Operations, and select Scan → Scan to Add Volumes to use a Barcode scanner to add [Volumes](#) to your default [Repository](#).

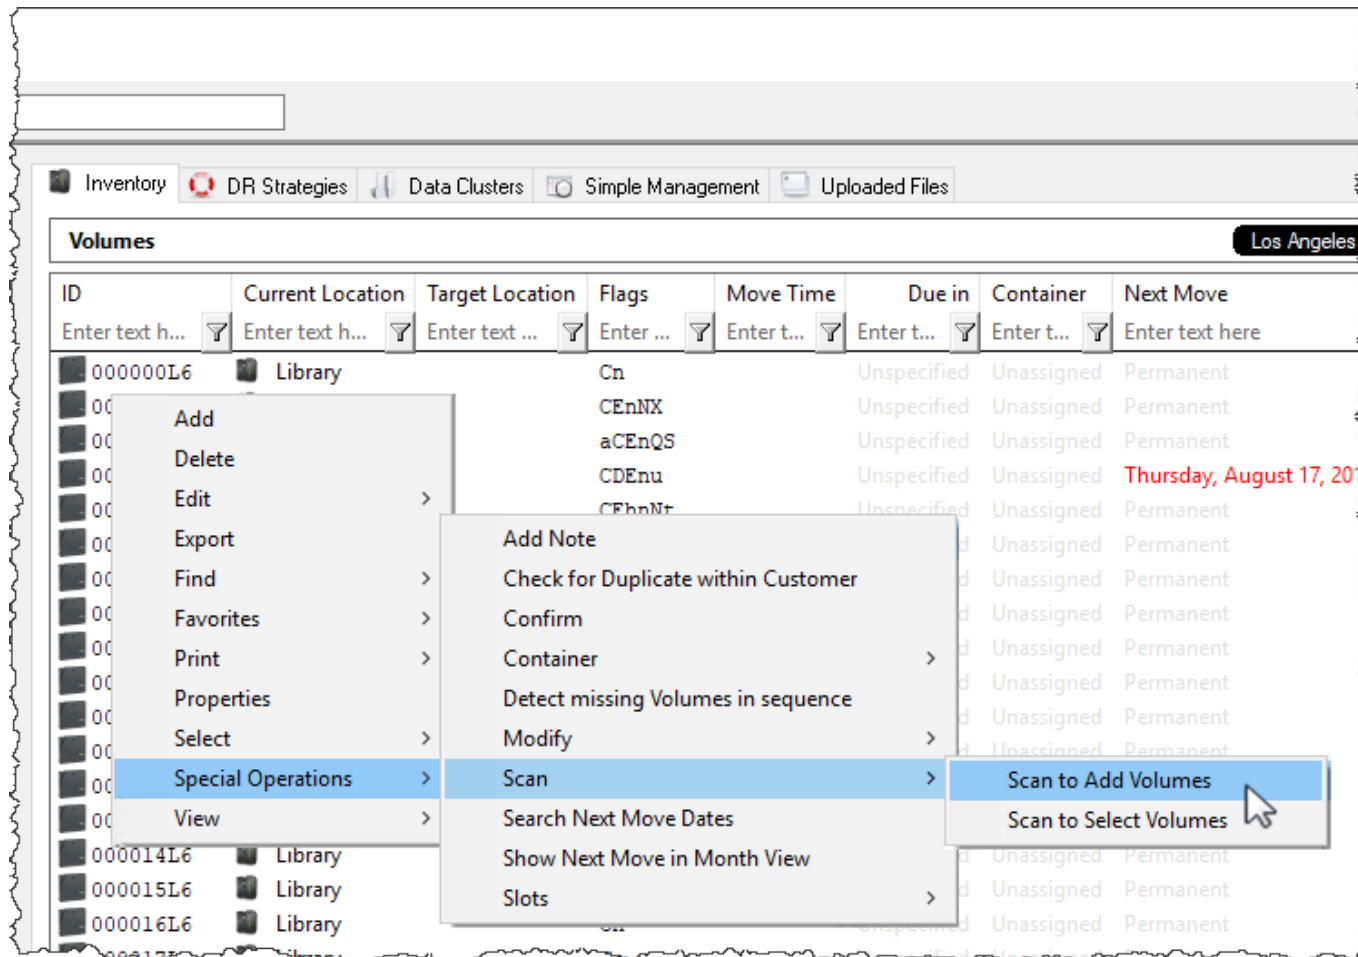

To add [Volumes](#) to a [Repository](#) other than your default, right-click the required [Repository](#) and select Scan → To Add and scan [Volumes](#) to be added.

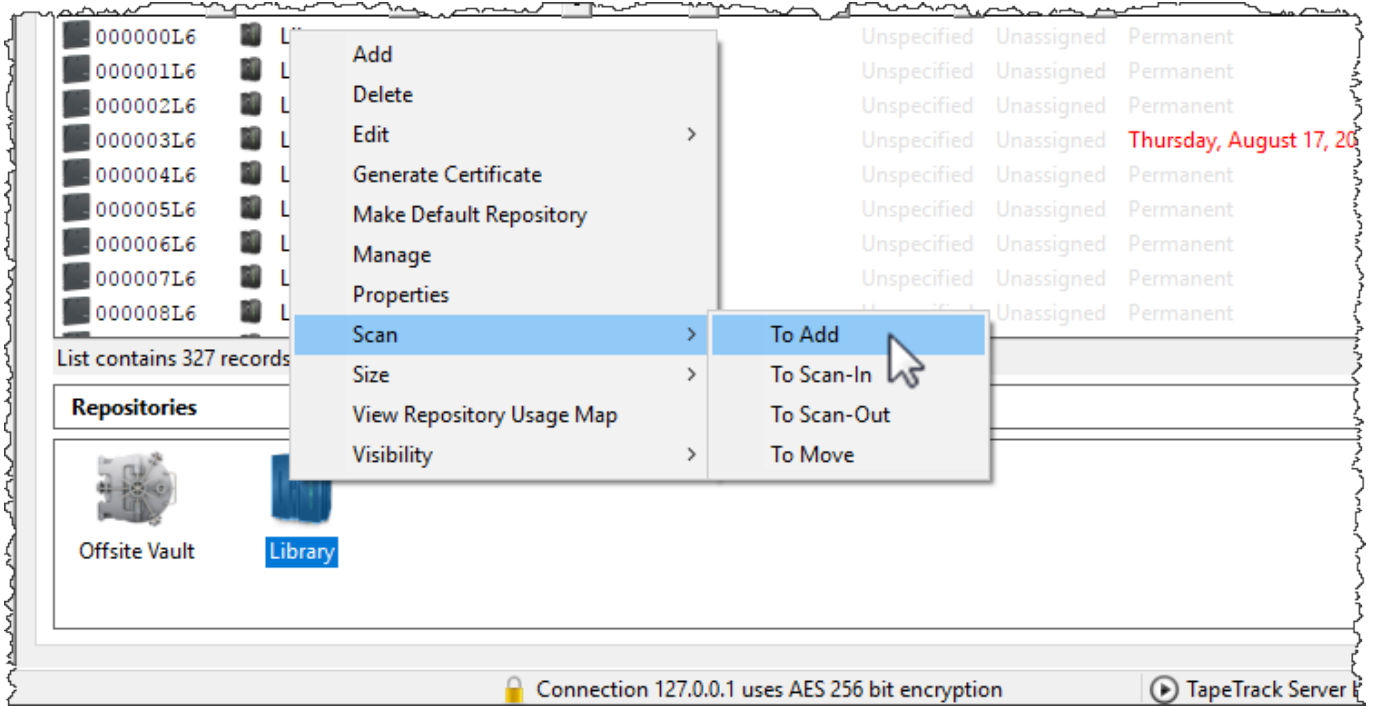


Deleting Volumes


 You must have **Alter** rights to delete [Volumes](#)


Select the required [Volume](#) , or range of [Volumes](#) from the inventory window you want to delete.

Right-click highlighted [Volumes](#) and select Delete, or press Delete (DEL) on the keyboard.

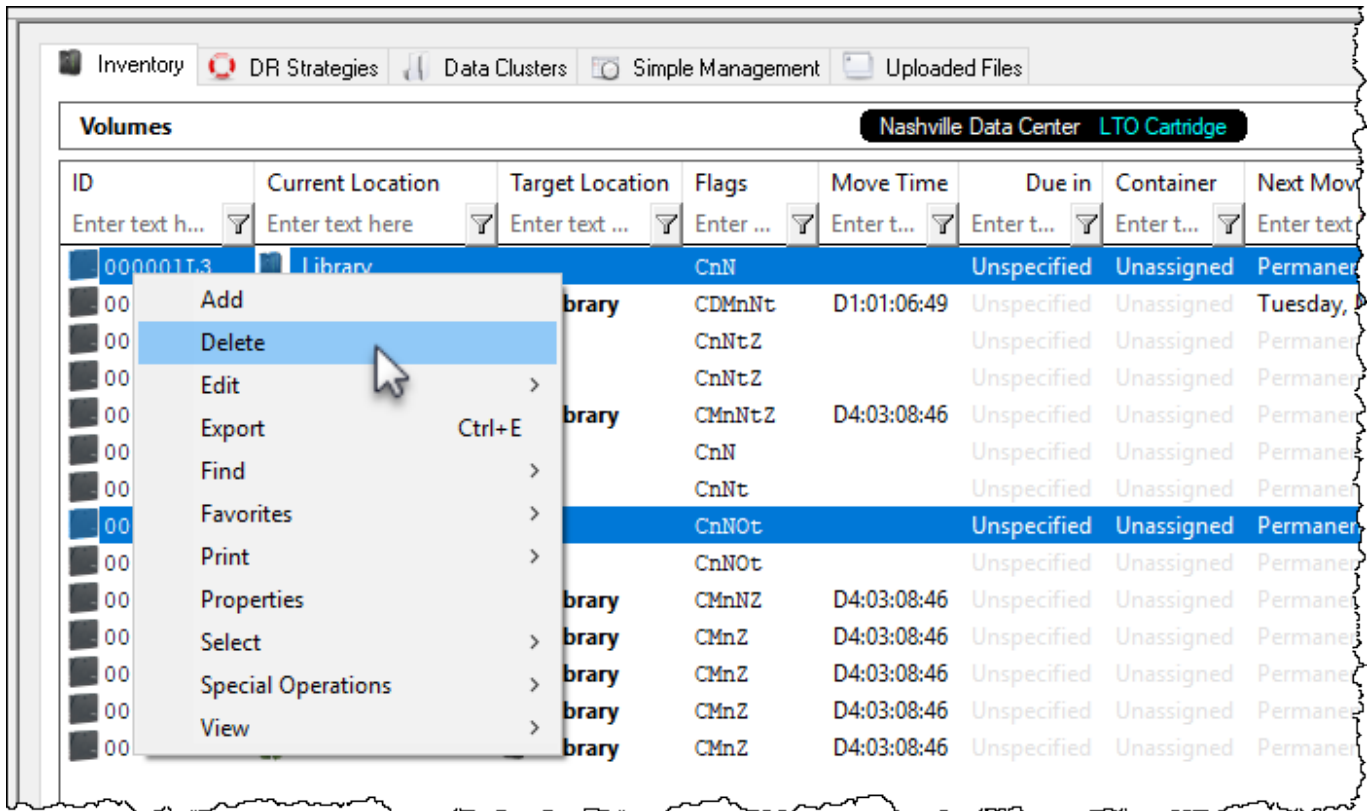

The **Volume Deletion** window will display the **Repository** where the **Volumes** to be deleted are located in the top pane and **Volume-ID's** in the lower pane.


 If the **Volume Deletion** window is not displayed it is because you are running an outdated version of TapeMaster. Instructions to delete **Volumes** in older versions of TapeMaster can be found [here](#)

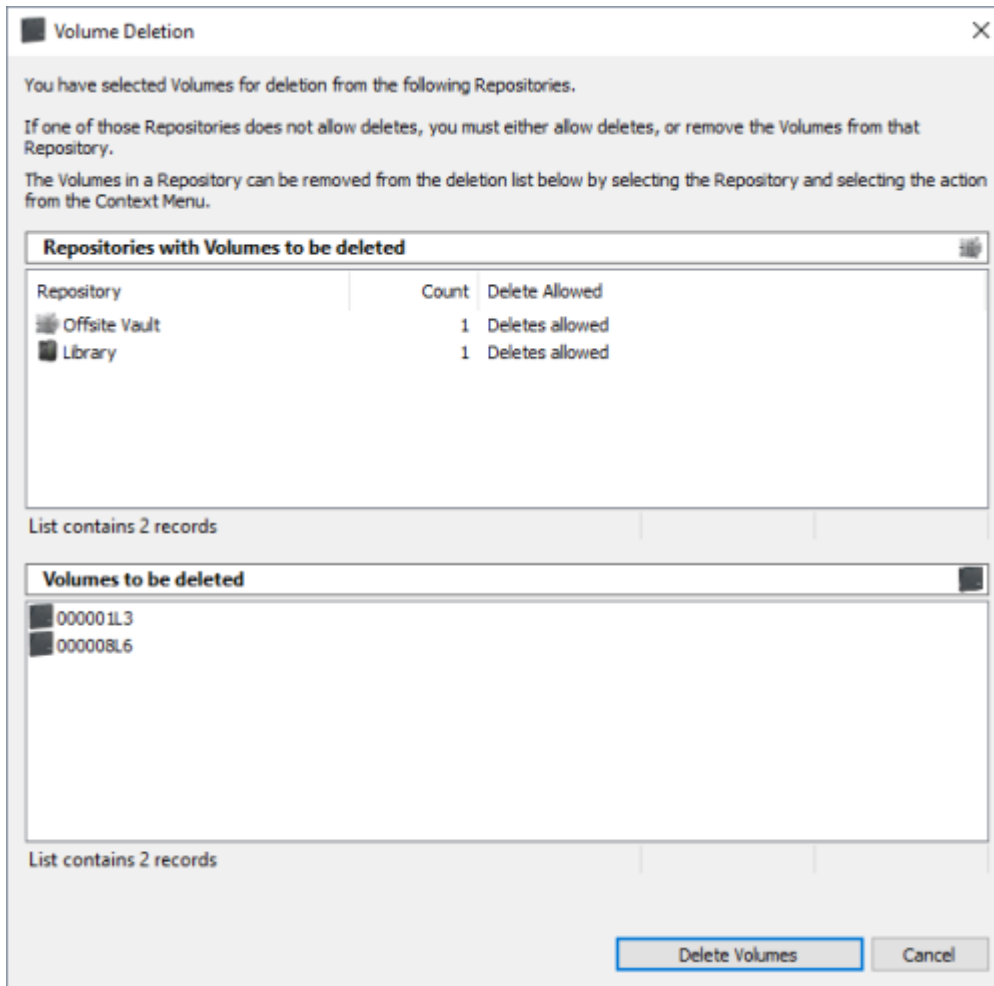


Each row in the top pane will, along with the [Repository Description](#) (or ID), list the number of [Volumes](#) for deletion and the delete status of either **Deletes Allowed** or **Deletes Forbidden**.

For any [Repository](#) listed with a status of **Deletes Forbidden** you must either:

- Right-clicking the row and selecting **Allow** to change status to **Deletes Allowed**
- Right-clicking the row and selecting **Remove** to remove the [Volumes](#) before deletion of any [Volumes](#) located in a [Repository](#) with **Deletes Allowed** status.

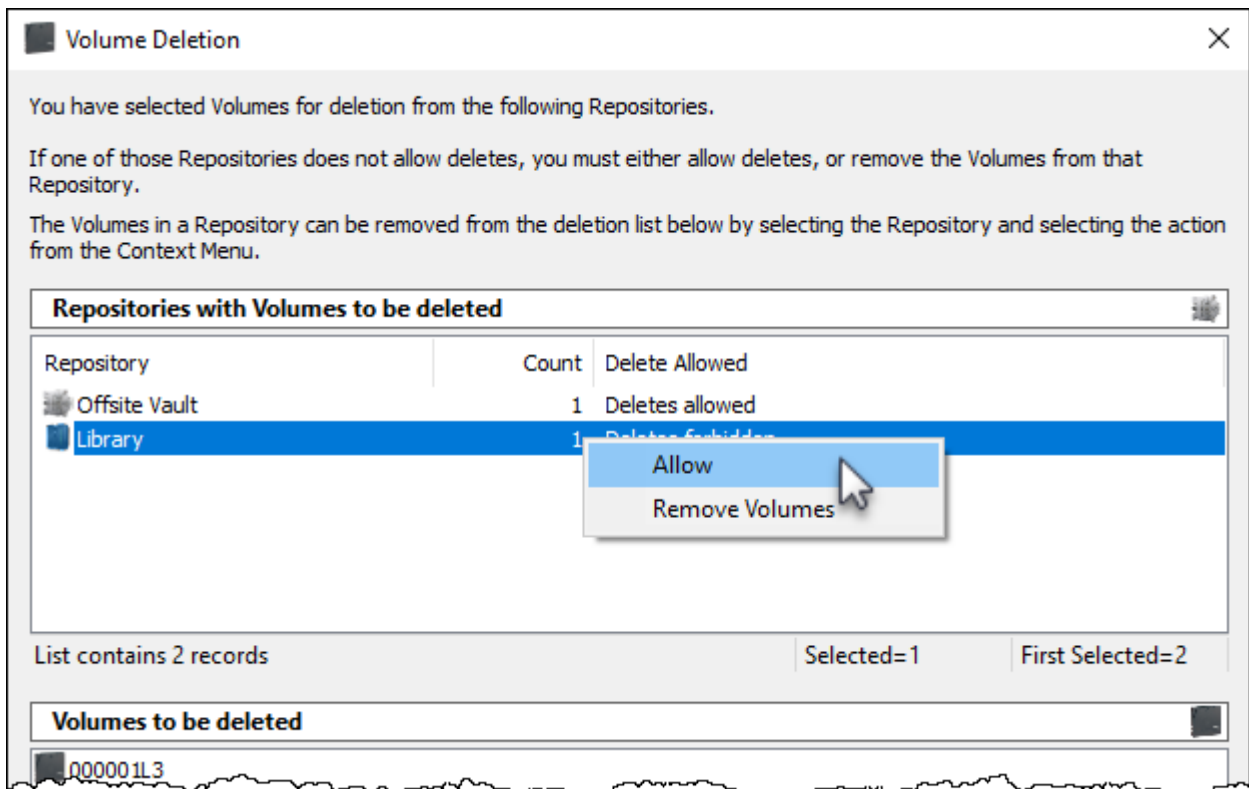


Click Delete Volumes and Yes to the delete confirmation to delete the Volumes.

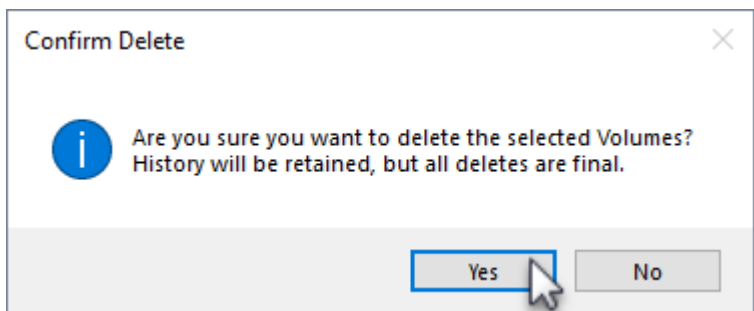


As deleting Volumes is permanent, clicking No to the delete confirmation is your last opportunity to cancel the delete function.


When a Volume is deleted its historical entries remain in the database. If a deleted Volume is added back into the database, all previous history records including when deleted and added back, are listed under that Volumes History tab.

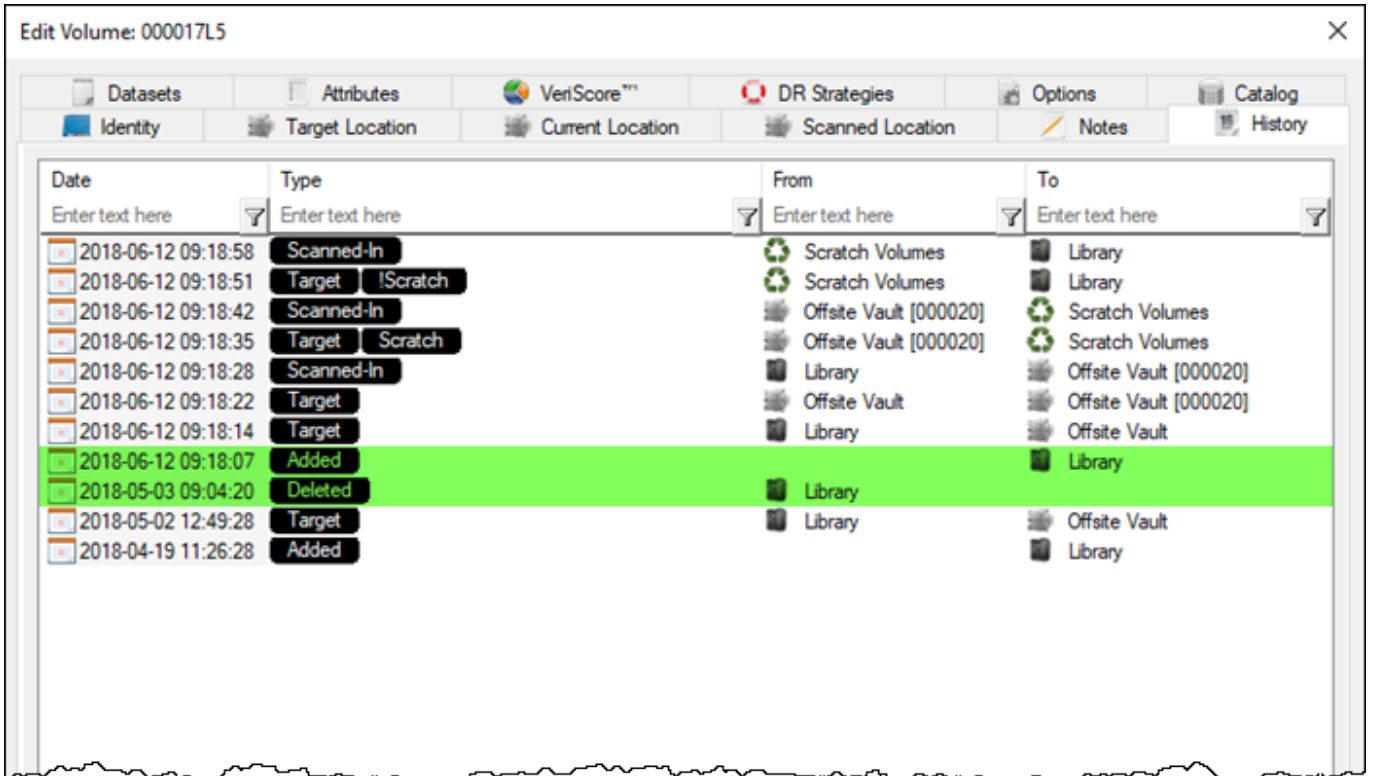

As setting **Repository** to **Allow Deletes** alters the properties of that **Repository**, if required, reset the **Repository** to **no deletes** by right-clicking the required **Repository**, selecting **Properties** and change the **Allow Deletes** field in the **Options** tab to **false**.

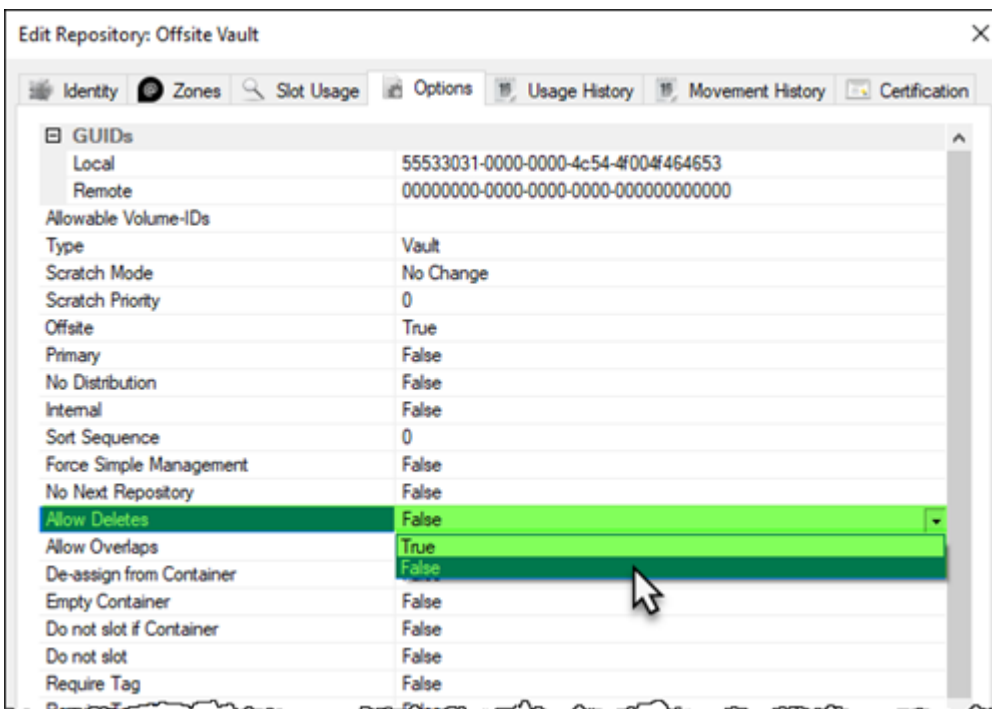

See [Special Operations Menu](#) for further information.



From:

<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://rtfm.tapetrack.com/master/volumes?rev=1627955775>

Last update: **2025/01/21 22:07**

