


# Allow Deletes

The [Repository Option Allow Deletes](#) allows the deletion of [Volumes](#) when they are located in this [Repository](#).

 User requires Alter rights to delete Volumes

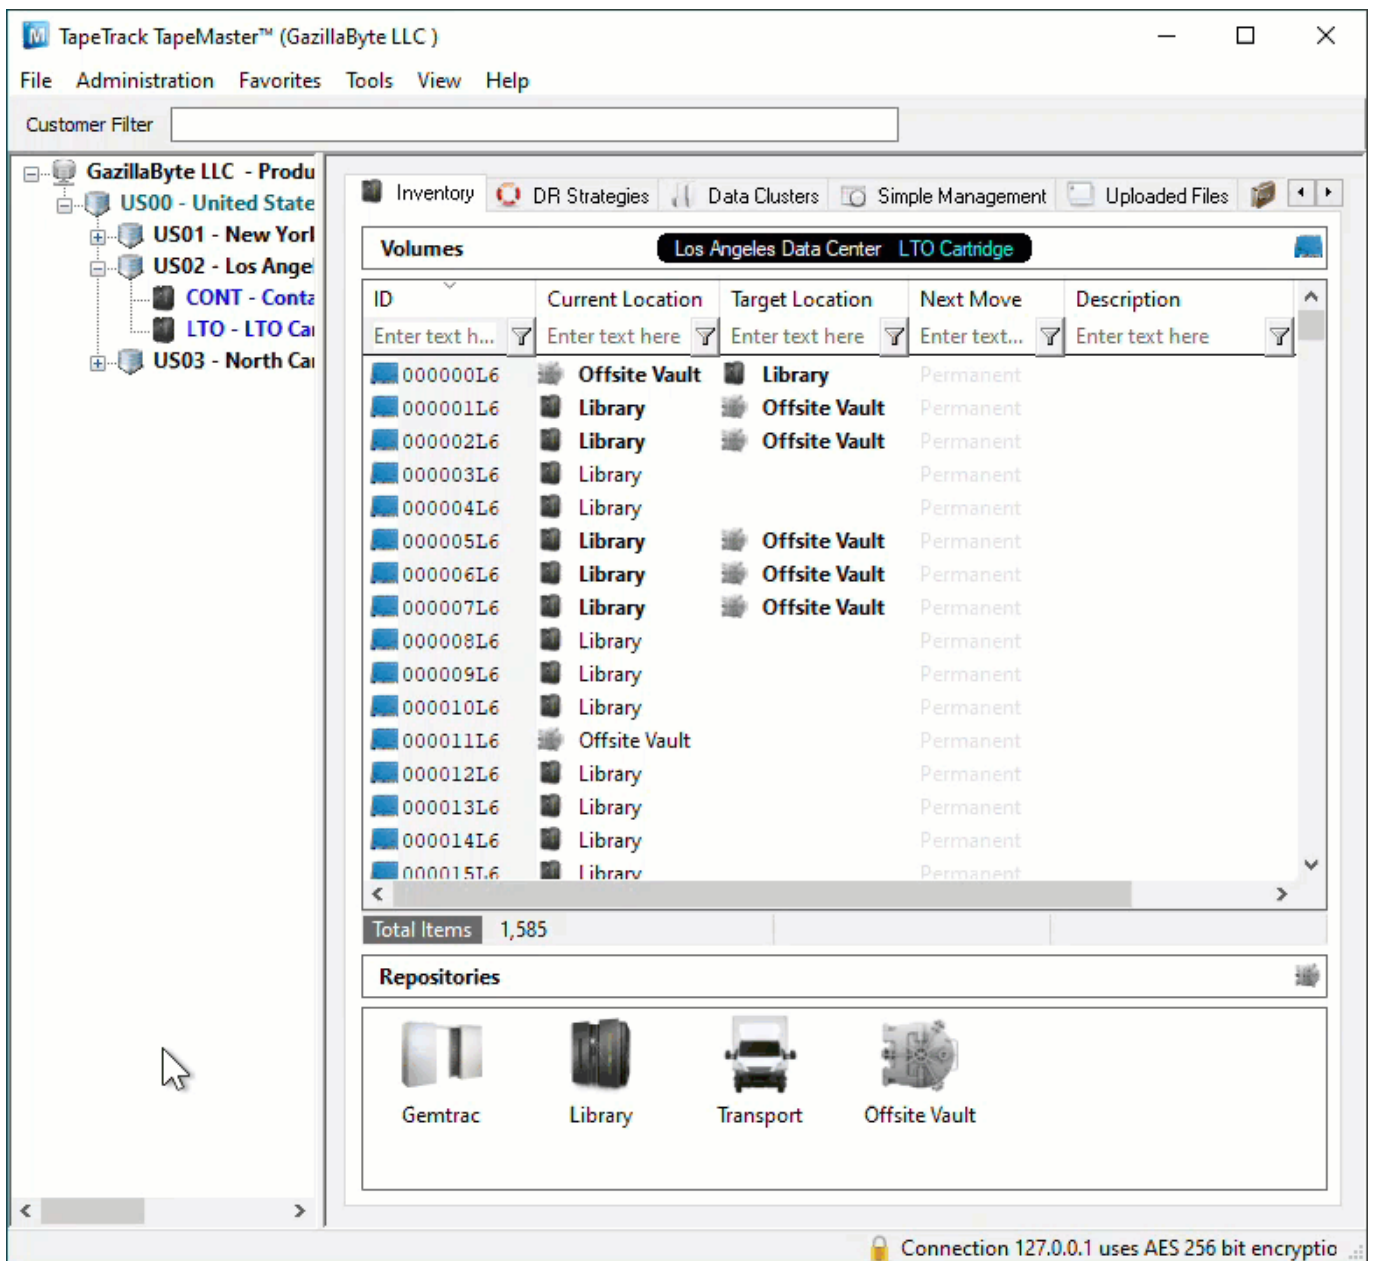

## Allow Deletes Options

- True: Allow deletion of [Volumes](#).
- False: Disallow deletion of [Volumes](#).

It is recommended to keep [Allow Deletes](#) set to False when not needed to stop accidental

deletion of [Volumes](#).

[options](#), [repository options](#)

From:  
<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:  
[https://rtfm.tapetrack.com/options/repository/allow\\_deletes?rev=1614126648](https://rtfm.tapetrack.com/options/repository/allow_deletes?rev=1614126648)

Last update: **2025/01/21 22:07**

