

Enabling Replication

The following information illustrates the steps required to enable a High Availability Replicant Server.

It is assumed that you already have a functional installation of TapeTrack Server running.


All steps must be performed in the order presented to create a successful connection between the Master and Replicant Server.

IP addresses included in the instructions are for demonstration only, these must be replaced with your correct values.

Steps On Remote Server


[Install the TapeTrack Framework Server software on your Replicant machine.](#)

[Stop the service on the Replicant machine.](#)

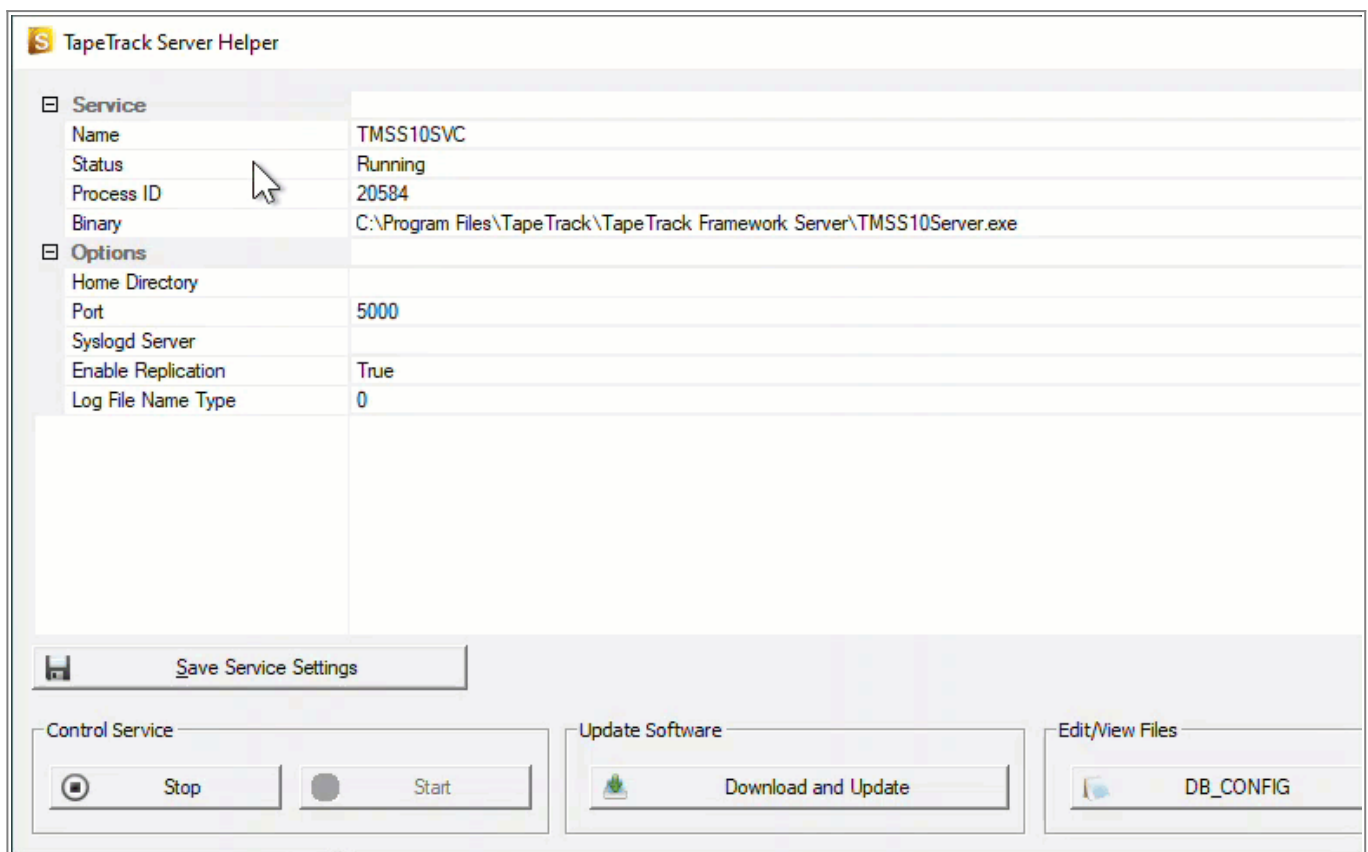

Navigate Windows File Explorer to the TapeTrack Framework Server installation directory (TapeTrack\TapeTrack Framework Server) to the var\db folder.

Delete all database files on the Replicant machine (all files in the TapeTrack\TapeTrack Framework Server\var\db directory) **EXCEPT** the [DB_CONFIG](#) file).

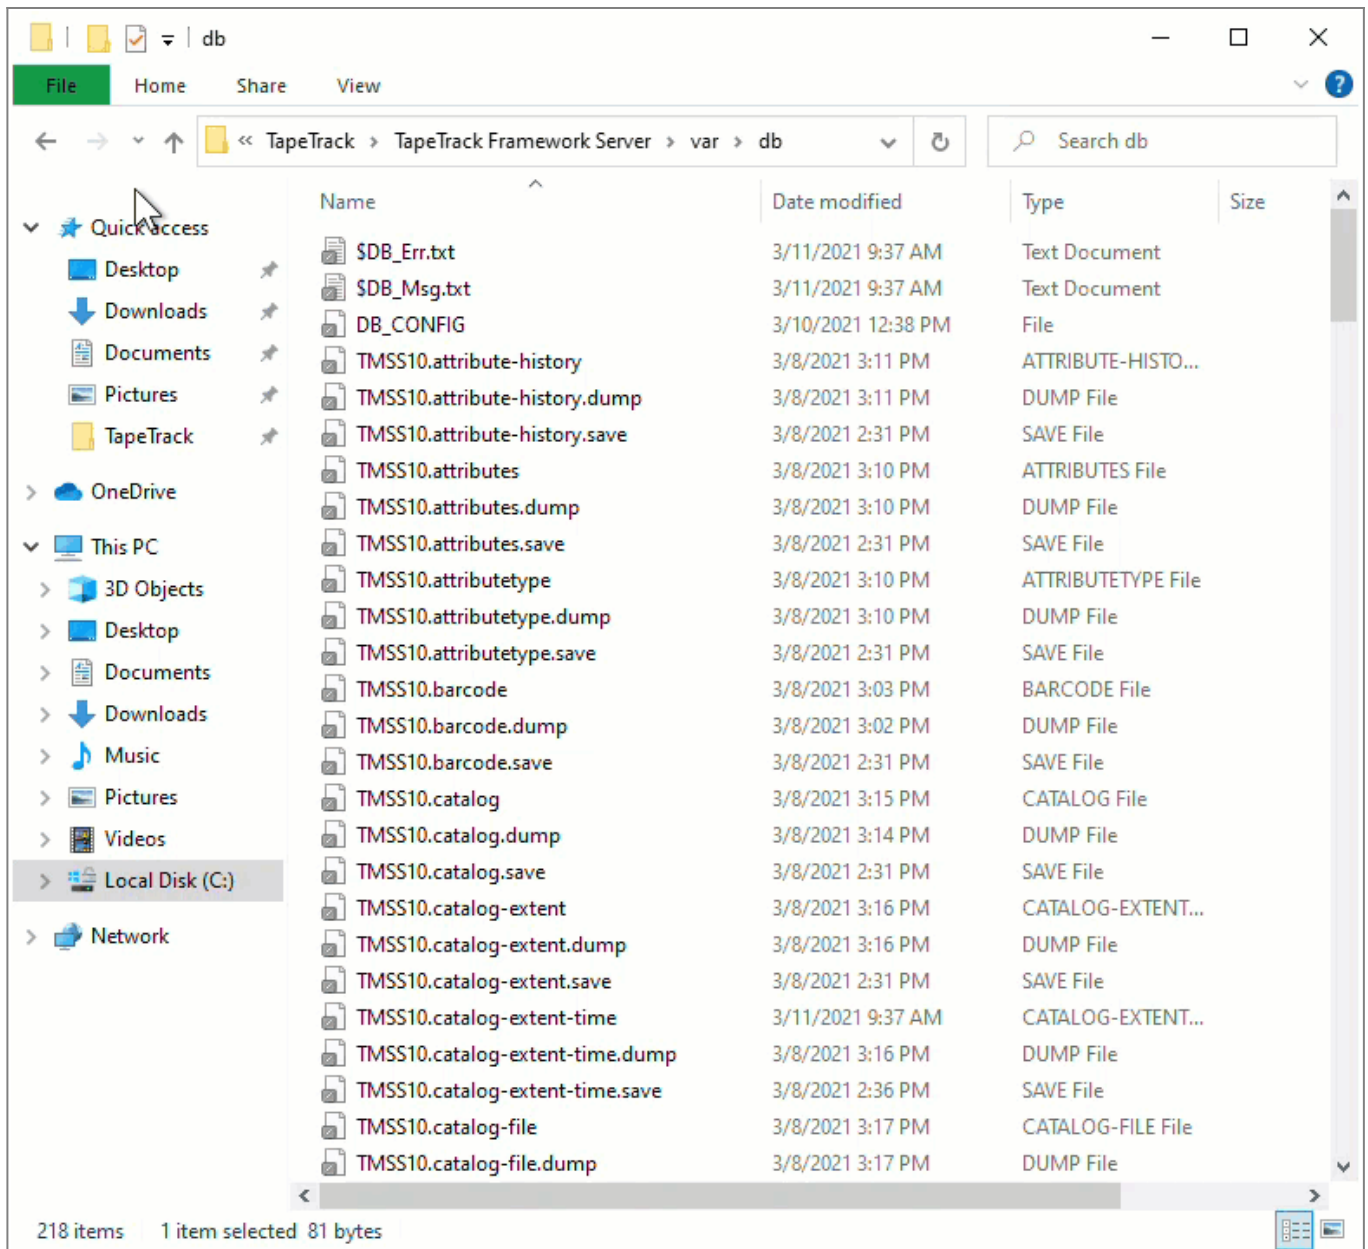

Open the DB_CONFIG file in Notepad, or equivalent text editor.

Edit the TapeTrack\TapeTrack Framework Server\DB_CONFIG file to remove the comments (#'s) starting from the line **rep-set-priority 0** to make the machine a Replicant.

Edit the Replicant Server and Master Server host names in the DB_CONFIG file.

- Replace **replicant-1.tapetrack.com** with the IP address of **your** Replicant Server (your_replicant_IP_address used as Replicant IP example).
- Replace **master.tapetrack.com** with the IP address of **your** Master Server (your_master_IP_address used as Master IP example).



Ensure you use the IP4 address for the Master and Replicant Server as using the domain name can cause issues with the IP6 address replacing the IP4 address, stopping the Master and Replicant communication.

```
DB_CONFIG - Notepad
File Edit Format View Help
set_flags DB_LOG_AUTOREMOVE
#
# Set the log directory to an alternate directory
#
set_lg_dir ..\dblogs
#
# Set Verbose Output
#
set_verbose DB_VERB_DEADLOCK
set_verbose DB_VERB_RECOVERY
set_verbose DB_VERB_REPLICATION
set_verbose DB_VERB_WAITSFOR
#
#rep_set_priority 1
#repmgr_site replicant-1.tapetrack.com 5010
#repmgr_site master.tapetrack.com 5010 db_local_site on db_group_creator on
#
# Optional settings
#
#rep_set_config DB_REP_CONF_BULK on
#rep_set_config DB_REP_CONF_AUTOINIT off
#
#
#rep_set_priority 0
#repmgr_site replicant-1.tapetrack.com 5010 db_local_site on
#repmgr_site master.tapetrack.com 5010 db_bootstrap_helper on
#rep_set_config DB_REP_CONF_BULK on
Ln 1, Col 1 100% Windows (CRLF) UTF-8
```



Ensure that the replication TCP/IP ports specified in the [DB_CONFIG](#) file are open for inbound connections.

Steps On Master Server

Stop the TapeTrack service on the master TapeTrack server.




Do Not delete any files on the master server

Edit the TapeTrack\TapeTrack Framework Server\[DB_CONFIG](#) file and remove the comments (#'s) starting from the line **rep-set-priority 1** to make the machine a master server.

Edit the [DB_CONFIG](#) file to define the local and remote server. Edit the Replicant Server and Master

Server host names in the [DB_CONFIG](#) file.


- Replace **replicant-1.tapetrack.com** with the domain name (or IP address) of **your** Replicant Server (your_replicant_IP_address used as Replicant IP example).
- Replace **master.tapetrack.com** with the domain name (or IP address) of **your** Master Server (your_master_IP_address used as Master IP example).

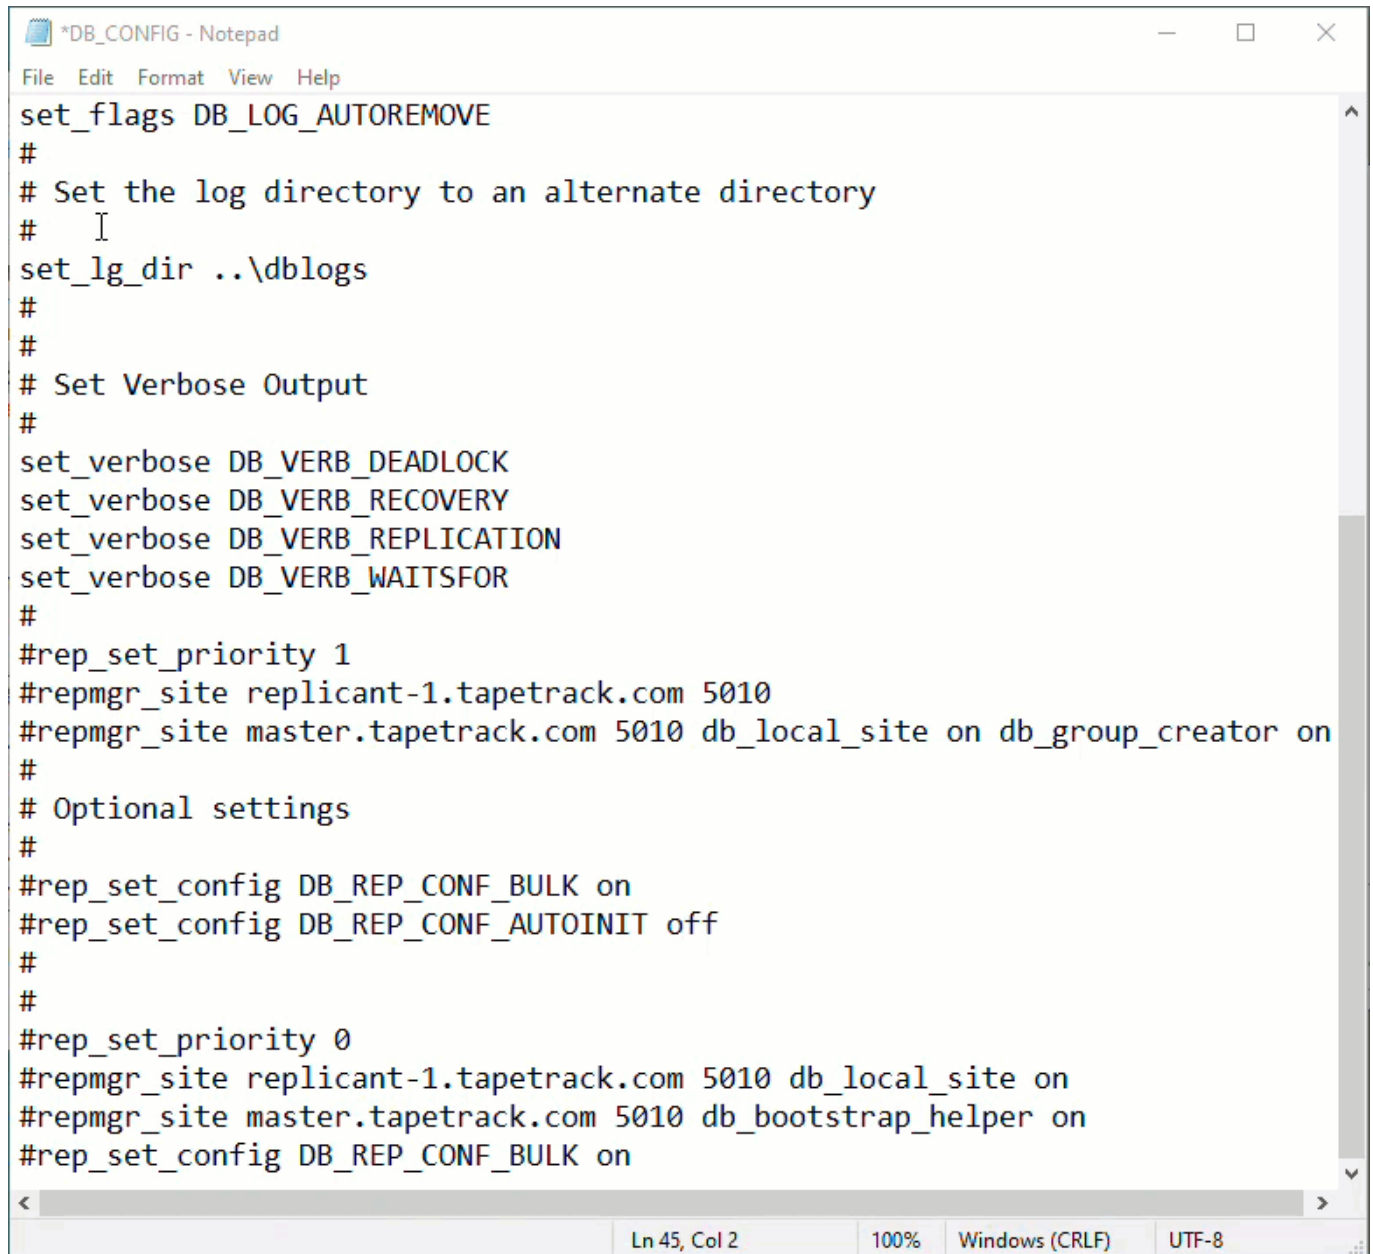


```
*DB_CONFIG - Notepad
File Edit Format View Help
set_flags DB_LOG_AUTOREMOVE
#
# Set the log directory to an alternate directory
#
set_lg_dir ..\dblogs
#
#
# Set Verbose Output
#
set_verbose DB_VERB_DEADLOCK
set_verbose DB_VERB_RECOVERY
set_verbose DB_VERB_REPLICATION
set_verbose DB_VERB_WAITSFOR
#
#rep_set_priority 1
#repmgr_site replicant-1.tapetrack.com 5010
#repmgr_site master.tapetrack.com 5010 db_local_site on db_group_creator on
#
# Optional settings
#
#rep_set_config DB_REP_CONF_BULK on
#rep_set_config DB_REP_CONF_AUTOINIT off
#
#
#rep_set_priority 0
#repmgr_site replicant-1.tapetrack.com 5010 db_local_site on
#repmgr_site master.tapetrack.com 5010 db_bootstrap_helper on
#rep_set_config DB_REP_CONF_BULK on
Ln 45, Col 2 100% Windows (CRLF) UTF-8
```

Delete all, and only, the files starting with `_db.` and `db.rep..`. This step is made easier if you sort the files in ascending order of file names to group them all together.

These files will be rebuilt when the server is restarted using the information of the new master and replicant details.

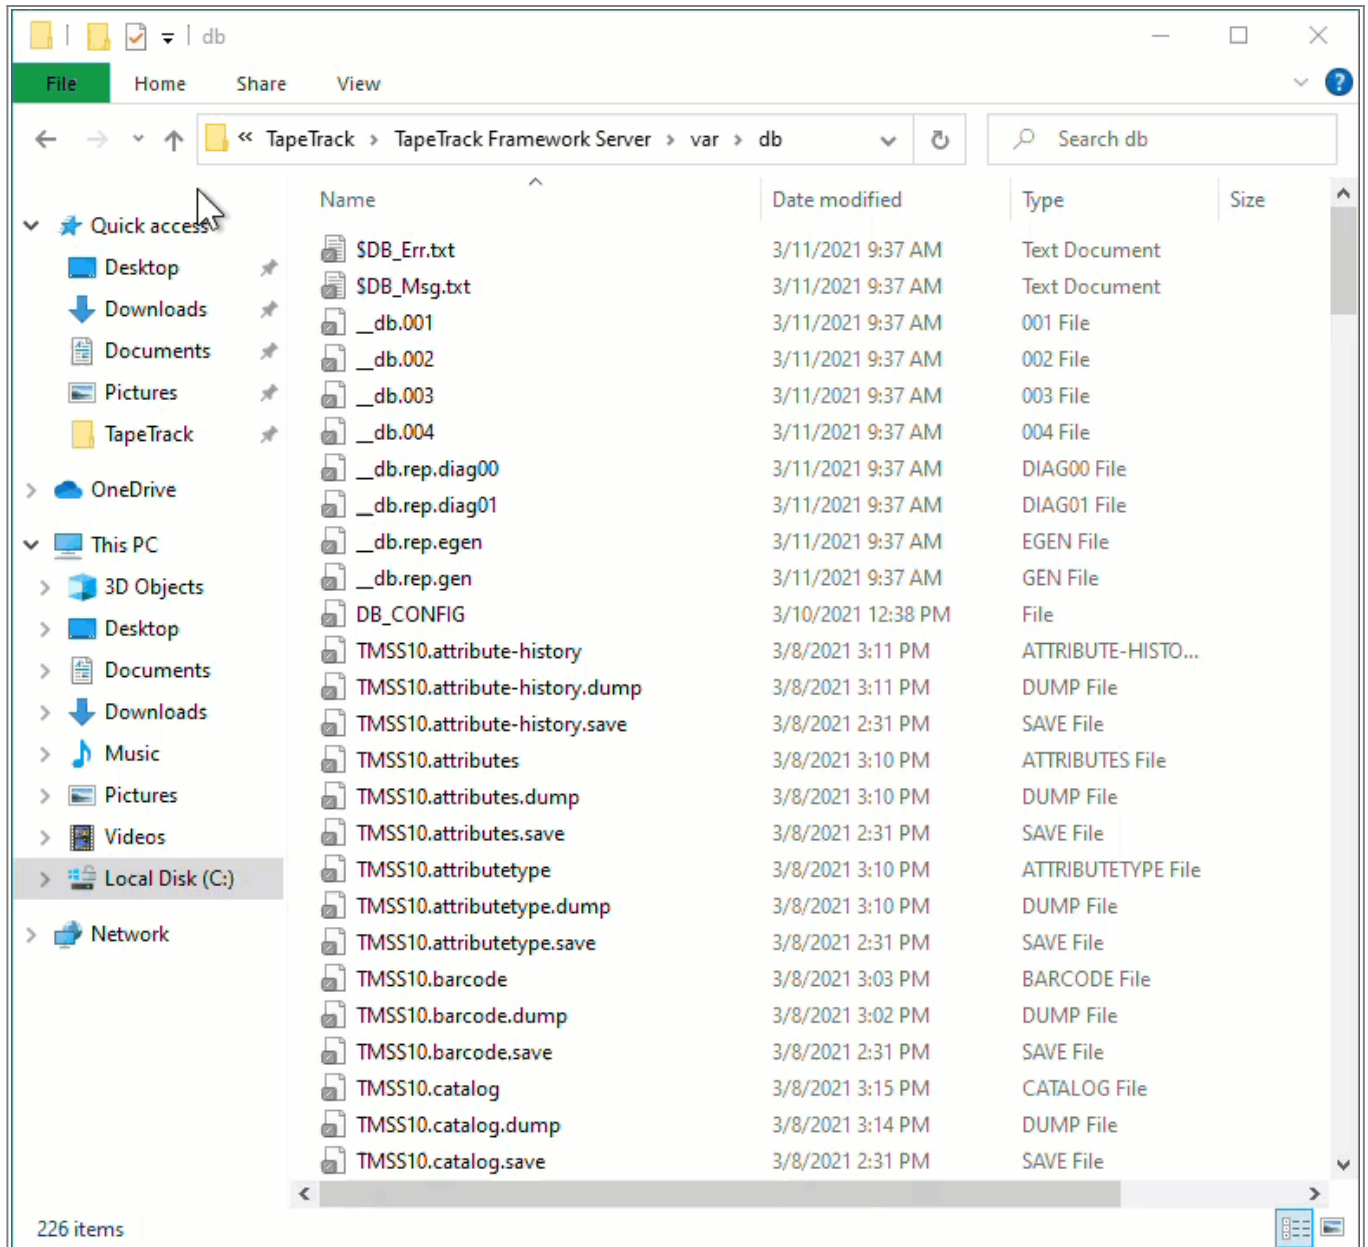

 Ensure that the replication TCP/IP ports are open for inbound/outbound connections.

Start The Servers

Start the TapeTrack service on the remote machine.

The replicant server will prepare the database for connection to the master server and move into Start Pending mode while waiting for the master server to respond.

The screenshot shows the 'TapeTrack Server Helper' interface. It features a table with two sections: 'Service' and 'Options'. The 'Service' section lists: Name (TMSS10SVC), Status (Start Pending), Process ID (4472), and Binary (C:\Program Files\TapeTrack\TapeTrack Framework Server\TMSS10Server.exe). The 'Options' section lists: Home Directory, Port (5000), Syslogd Server, Enable Replication (True), and Log File Name Type (0). Below the table is a 'Save Service Settings' button. At the bottom, there are three main control areas: 'Control Service' with 'Stop' and 'Start' buttons, 'Update Software' with a 'Download and Update' button, and 'Edit/View Files' with a 'DB_CONFIG' button.

| Service | |
|------------|------------------------------------------------------------------------|
| Name | TMSS10SVC |
| Status | Start Pending |
| Process ID | 4472 |
| Binary | C:\Program Files\TapeTrack\TapeTrack Framework Server\TMSS10Server.exe |

| Options | |
|--------------------|------|
| Home Directory | |
| Port | 5000 |
| Syslogd Server | |
| Enable Replication | True |
| Log File Name Type | 0 |

Promptly [Start the master TapeTrack Server](#).

The master server will now connect to the replicant server and load the database information across the connection. This may take time depending on the database size.

This screenshot shows the 'TapeTrack Server Helper' interface after the service has been stopped. The 'Service' section now shows: Name (TMSS10SVC), Status (Stopped), and Binary (C:\Program Files\TapeTrack\TapeTrack Framework Server\TMSS10Server.exe). The 'Options' section remains the same as in the previous screenshot. The 'Control Service' area now has a 'Stop' button that is disabled (greyed out) and a 'Start' button that is active. The 'Update Software' and 'Edit/View Files' areas are identical to the previous screenshot.

| Service | |
|---------|------------------------------------------------------------------------|
| Name | TMSS10SVC |
| Status | Stopped |
| Binary | C:\Program Files\TapeTrack\TapeTrack Framework Server\TMSS10Server.exe |

| Options | |
|--------------------|------|
| Home Directory | |
| Port | 5000 |
| Syslogd Server | |
| Enable Replication | True |
| Log File Name Type | 0 |

Confirming Functionality Of Primary And Replicant Servers

Open \$DB_Msg.txt file (in the var/db directory) on both the primary and replicant server to ensure that replication is functional.



Ensure that all firewall ports are open to allow the replication traffic to pass between the replicants.

Master \$DB_Msg.txt file showing connection between master and replicant and the process of sending database information.


```

SDB_Msg.txt - Notepad
File Edit Format View Help
2021-03-11 11:52:55 BDB1519 Maximum transaction ID 0 recovery checkpoint [1][2209496]
2021-03-11 11:52:55 [77781:703000][16880/18164] REP_UNDEF: set membership for 192.168.120.96:5010 4 (wa
2021-03-11 11:54:48 [77894:671000][9420/14500] REP_UNDEF: EID 0 is assigned for site 192.168.0.197:5010
2021-03-11 11:54:48 [77894:671000][9420/14500] REP_UNDEF: EID 1 is assigned for site 192.168.0.96:5010
2021-03-11 11:54:48 BDB2526 Finding last valid log LSN: file: 1 offset 2232154
2021-03-11 11:54:48 BDB1518 Recovery complete at Thu Mar 11 11:54:48 2021
2021-03-11 11:54:48 BDB1519 Maximum transaction ID 0 recovery checkpoint [1][2232098]
2021-03-11 11:54:48 [77894:703000][9420/14500] REP_UNDEF: set membership for 192.168.0.96:5010 4 (was 0
2021-03-11 11:54:48 [77894:718000][9420/14500] REP_UNDEF: New master gen 1, egen 2
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: rep_start: Old log version was 19
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: restore_prep: No prepares. Skip.
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:718000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =
2021-03-11 11:54:48 [77894:734000][9420/14500] MASTER: var/db rep_send_message: msgv = 7 logv 19 gen =

```

Replicant \$DB_Msg.txt file showing connection between master and replicant, validation of connection and receiving database information.

```
DB_Msg.txt - Notepad
File Edit Format View Help
2021-03-11 11:56:54 [850:968000][636/12292] REP_UNDEF: Read in gen 0
2021-03-11 11:56:54 [850:968000][636/12292] REP_UNDEF: Read in egen 1
2021-03-11 11:56:54 [850:968000][636/12292] REP_UNDEF: EID 0 is assigned for site 192.168.0.197:5010
2021-03-11 11:56:54 [850:968000][636/12292] REP_UNDEF: EID 1 is assigned for site 192.168.0.96:5010
2021-03-11 11:56:54 BDB2525 No log files found
2021-03-11 11:56:54 [850:984000][636/12292] REP_UNDEF: try join request to site site 192.168.0.96:5010
2021-03-11 11:56:54 [850:984000][636/12292] REP_UNDEF: connection established
2021-03-11 11:56:54 [851:15000][636/12292] REP_UNDEF: set membership for 192.168.0.197:5010 4 (was 0)
2021-03-11 11:56:54 [851:15000][636/12292] REP_UNDEF: set membership for 192.168.0.96:5010 4 (was 0)
2021-03-11 11:56:54 [851:15000][636/12292] REP_UNDEF: rep_start: Found old version log 19
2021-03-11 11:56:54 [851:15000][636/12292] CLIENT: var/db rep_send_message: msgv = 7 logv 19 gen = 0 ei
2021-03-11 11:56:54 [851:15000][636/15880] CLIENT: starting election thread
2021-03-11 11:56:54 [851:15000][636/12696] CLIENT: starting connector thread, eid 1
2021-03-11 11:56:54 [851:15000][636/11468] CLIENT: accepted a new connection
2021-03-11 11:56:54 [851:15000][636/12696] CLIENT: connecting to site 192.168.0.96:5010
2021-03-11 11:56:54 [851:15000][636/15880] CLIENT: var/db rep_send_message: msgv = 7 logv 19 gen = 0 ei
2021-03-11 11:56:54 [851:31000][636/12696] CLIENT: connection established
2021-03-11 11:56:54 [851:31000][636/11468] CLIENT: handshake from connecting site 192.168.0.96:5010 EID
2021-03-11 11:56:54 [851:31000][636/11468] CLIENT: handshake with no known master to wake election thre
2021-03-11 11:56:54 [851:31000][636/12696] CLIENT: connector thread is exiting
2021-03-11 11:56:56 [853:15000][636/15880] CLIENT: var/db rep_send_message: msgv = 7 logv 19 gen = 0 ei
2021-03-11 11:56:56 [853:15000][636/15896] CLIENT: var/db rep_process_message: msgv = 7 logv 19 gen = 1
2021-03-11 11:56:56 [853:15000][636/15896] CLIENT: var/db rep_send_message: msgv = 7 logv 19 gen = 0 ei
2021-03-11 11:56:56 [853:15000][636/16096] CLIENT: var/db rep_process_message: msgv = 7 logv 19 gen = 1
2021-03-11 11:56:56 [853:31000][636/16096] CLIENT: Election done; egen 1
2021-03-11 11:56:56 [853:31000][636/16096] CLIENT: Updating gen from 0 to 1 from master 1
2021-03-11 11:56:57 [853:31000][636/16096] CLIENT: egen: 2. rep version 7
2021-03-11 11:56:57 [853:31000][636/16096] CLIENT: No commit or ckp found. Truncate log.
```

 The replication communications are not encrypted so if replication is enabled you should ensure that all machines that are replicated are in a trusted network or connected via a secure VPN connection.

Server replication troubleshooting

See Also

[Restoring replicant server to master server status](#)

From: <https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link: <https://rtfm.tapetrack.com/server/replication?rev=1615425385>

Last update: **2025/01/21 22:07**

