
# **Decommissioning Server Replication**

#### **DB Config File**

On the server that your master Framework Server is installed, navigate in Windows File Explorer to the TapeTrack Installation folder (default = C:\Program Files\TapeTrack\TapeTrack Framework Server\var\db) and open the file DB CONFIG with a text editor such as Notepad.

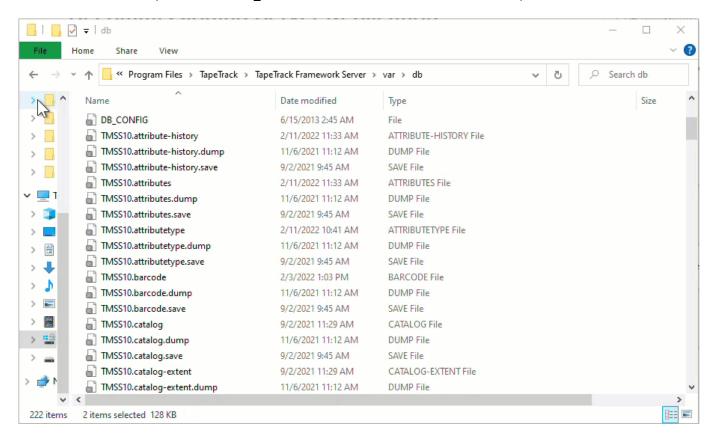

### **Edit Config File**

Scroll to the bottom of the config file until you see the replication code section

```
rep_set_priority 1
repmgr_site replicant-1.tapetrack.com 5010
repmgr_site master.tapetrack.com 5010 db_local_site on db_group_creator on
```

Add a hash tag to the start of the lines of code to convert them to comments so they will be skipped when TapeTrack loads the config file.

```
#rep_set_priority 1
#repmgr_site replicant-1.tapetrack.com 5010
#repmgr_site master.tapetrack.com 5010 db_local_site on db_group_creator on
```

Save the file, ensuring that it saves as DB\_CONFIG.cfg and not .txt

#### **Restart The Server**

Follow instructions at Stop and Restart the Server, to load in the new config file details.

## **Stop Replicant**

Navigate to the location of your Replicant Server installation and Stop the Server.

From:

https://rtfm.tapetrack.com/ - TapeTrack Documentation

Permanent link:

https://rtfm.tapetrack.com/server/replication\_decomission?rev=1644887229

Last update: 2025/01/21 22:07



https://rtfm.tapetrack.com/ Printed on 2025/12/01 06:29