
Decommissioning Server Replication

DB Config File

On the server that your master Framework Server is installed, navigate in Windows File Explorer to the TapeTrack Installation folder (default = C:\Program Files\TapeTrack\TapeTrack Framework Server\var\db) and open the file DB CONFIG with a text editor such as Notepad.

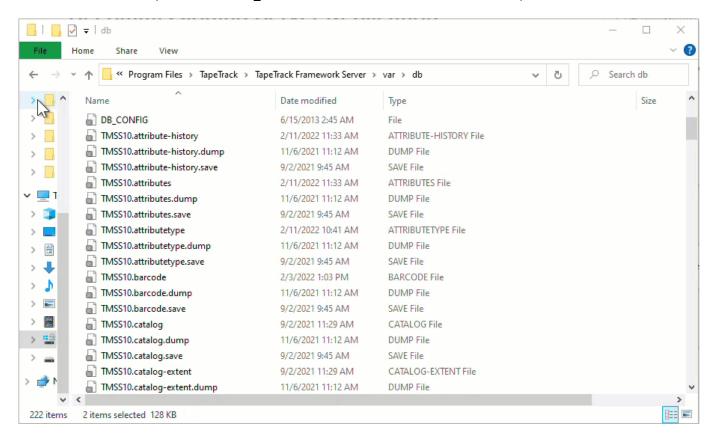

Edit Config File

Scroll to the bottom of the config file until you see the replication code section

```
rep_set_priority 1
repmgr_site replicant-1.tapetrack.com 5010
repmgr_site master.tapetrack.com 5010 db_local_site on db_group_creator on
```

Add a hash tag to the start of the lines of code to convert them to comments so they will be skipped when TapeTrack loads the config file.

```
#rep_set_priority 1
#repmgr_site replicant-1.tapetrack.com 5010
#repmgr_site master.tapetrack.com 5010 db_local_site on db_group_creator on
```

Save the file, ensuring that it saves as DB_CONFIG.cfg and not .txt

Restart The Server

Follow instructions at Stop and Restart the Server, to load in the new config file details.

Stop Replicant Database

Navigate to the location of your Replicant Server installation and Stop the Server.

From:

https://rtfm.tapetrack.com/ - TapeTrack Documentation

Permanent link:

https://rtfm.tapetrack.com/server/replication_decomission?rev=1644887274

Last update: 2025/01/21 22:07



https://rtfm.tapetrack.com/ Printed on 2025/12/01 06:29