


# Decommissioning Server Replication

## DB Config File

On the server that your master Framework Server is installed, navigate in Windows File Explorer to the TapeTrack Installation folder (default = C:\Program Files\TapeTrack\TapeTrack Framework Server\var\db) and open the file DB\_CONFIG with a text editor such as Notepad.

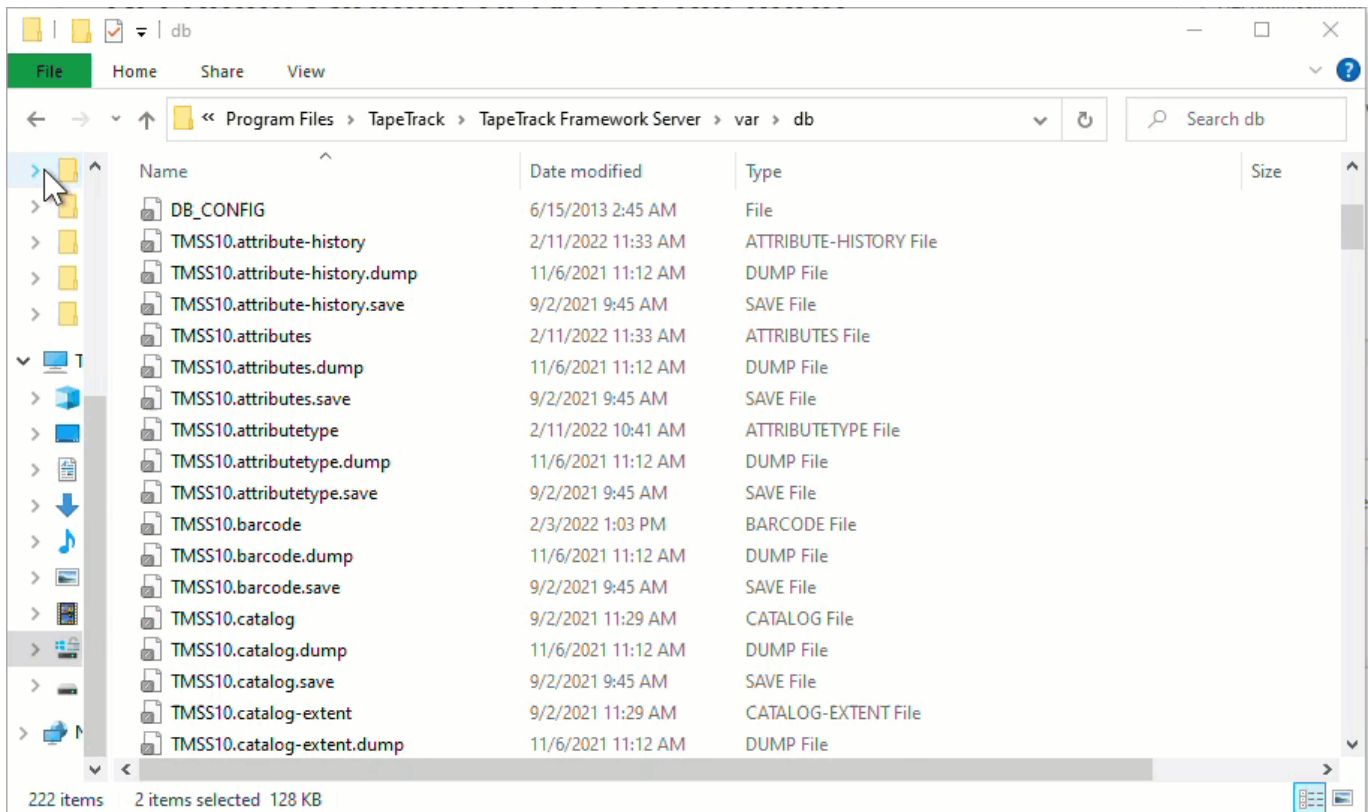

## Edit Config File

Scroll to the bottom of the config file until you see the replication code section

```
rep_set_priority 1
repmgr_site replicant-1.tapetrack.com 5010
repmgr_site master.tapetrack.com 5010 db_local_site on db_group_creator on
```

Add a hash tag to the start of the lines of code to convert them to comments so they will be skipped when TapeTrack loads the config file.

```
#rep_set_priority 1
#repmgr_site replicant-1.tapetrack.com 5010
#repmgr_site master.tapetrack.com 5010 db_local_site on db_group_creator on
```



Depending on your system setup you may need to add write permissions to allow your user-ID to save the config file.

Save the file, ensuring that it saves as DB\_CONFIG.cfg and not .txt

## Restart The Server

Follow instructions at [Stop and Restart the Server](#), to load in the new config file details.

## Stop Replicant Database

Navigate to the location of your Replicant Server installation and [Stop the Server](#).

From:  
<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:  
[https://rtfm.tapetrack.com/server/replication\\_decomission?rev=1644887567](https://rtfm.tapetrack.com/server/replication_decomission?rev=1644887567)

Last update: **2025/01/21 22:07**

