2025/05/07 22:00 1/2 Sync Definition Files

# **Sync Definition Files**


Sync definition files, have a file suffix of .ttidef and can be edited using a plain text editor such as Notepad or vi.

The purpose of a definition file is to provide the translations to TapeTrack on how to extract the required information from the source file, including location and format of the data.

All TapeTrack command line programs, including Sync, will look for a definition file named default.ttidef in the directory they are executed in unless the name and location of the definition file is named in the program call.

### **Creating A Definition File**

Using a text file editor create a file, using a descriptive name, with a suffix .ttidef (eg customer\_ACME.ttidef).

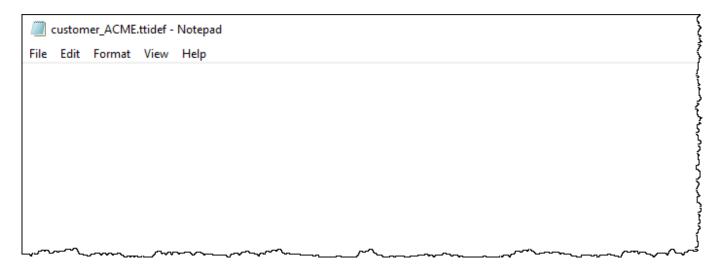

In Windows install, save this file to the TapeTrack\TapeTrack Sync\etc directory. You will also notice a sample ttidef file here that was created when Sync was installed.

## **Adding Definition Statements**

The definition statements required vary on the format of the source file, what information is required for extraction and translations needed on the extracted data.

#### **CSV Source File**

sample CSV file: CSV\_source.csv

volume,barcode,family,type,location,pool
000000L6,000000L6,tape,LTO,Library,weekly\_full

```
000001L6,000001L6,tape,LT0,Offsite,weekly_full
000002L6,000002L6,tape,LT0,Offsite,weekly_full
000003L6,000003L6,tape,LT0,Offsite,weekly_full
000004L6,000004L6,tape,LT0,Racking,weekly_full
000005L6,000005L6,tape,LT0,Library,weekly_full
000006L6,000006L6,tape,LT0,Racking,weekly_full
000007L6,000007L6,tape,LT0,Racking,weekly_full
```

#### **Add File Type Directives**

As we are using a comma delimitered CSV file we let the Sync engine know what the delimiter is.

```
setCSVDelimiter(",");
```

#### **Add Exclusion Directives**

Skip any line starting with volume, as it is a heading and not a Volume

```
AddString(EXCLUSION, 0, "volume*");
```

### **Setting Literal Values**

Sync constants, such as Customer-ID and Media-ID, can be set using literal values as these values do not change.

```
setLiteral(CUSTOMER, "ACME");
setLiteral(MEDIA, "LTO");
```

From:

https://rtfm.tapetrack.com/ - TapeTrack Documentation

Permanent link:

https://rtfm.tapetrack.com/sync/definition?rev=1622694468

Last update: 2025/01/21 22:07



https://rtfm.tapetrack.com/ Printed on 2025/05/07 22:00