

# Barcode Definition Examples


For detailed information about Barcode Definitions and how to create/edit them see [Barcode Definitions](#).

| Special Characters | Special Character Description | Description   |
|--------------------|-------------------------------|---|
| *                  | Asterisk                      | Wildcard that matches 0 or more characters                                      |
| ?                  | Question mark                 | Represents one character  |
| [ ]                | Open and close square bracket | Specify an array of characters listed to match the specified character position |

For detailed information on special characters see [Pattern Matching](#)

## Barcode Pattern Definition ????.\*

- ? translates to a single character
- \* translates as a wild card and matches anything

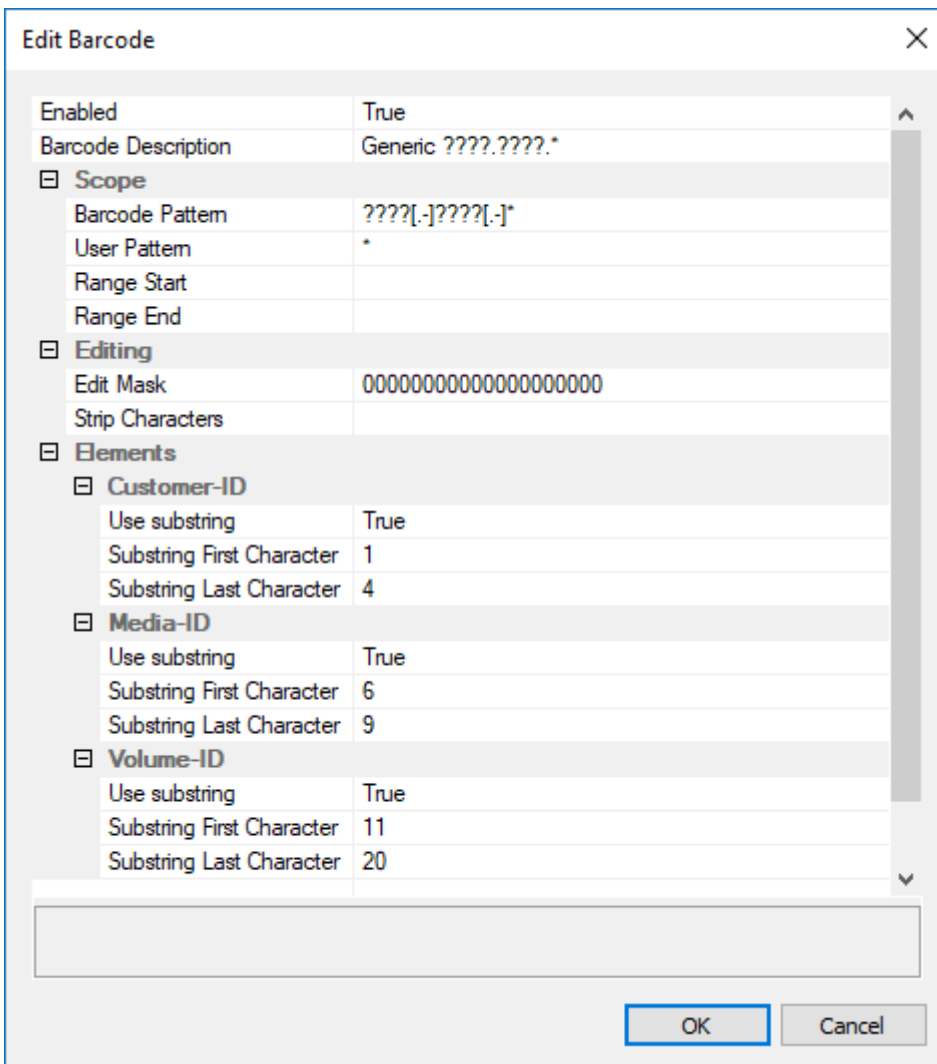

Barcode US01.CONT.CT100100

The filter will dissect the barcode to:

- Customer-ID: US01
  - Media-ID: CONT
  - Volume-ID: CT100100
- 

## Barcode Pattern Definition \*? ?\*

- ? translates to a single character
- \* translates as a wild card and matches anything

|                     |                      |
|---------------------|----------------------|
| Enabled             | True                 |
| Barcode Description | Space Barcode Hash   |
| Scope               |                      |
| Barcode Pattern     | *? ?*                |
| User Pattern        | *                    |
| Range Start         |                      |
| Range End           |                      |
| Editing             |                      |
| Edit Mask           | 00000000000000000000 |
| Strip Characters    |                      |
| Elements            |                      |
| Customer-ID         |                      |
| Use substring       | False                |
| Literal             |                      |
| Media-ID            |                      |
| Use substring       | False                |
| Literal             |                      |
| Volume-ID           |                      |
| Use substring       | False                |
| Literal             | #                    |

OK Cancel

Volume-ID MONDAY WEEK ONE

The filter will hash the barcode to

- X-D8ED51DA

[technote](#), [barcode](#), [tapemaster](#)

From:

<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://rtfm.tapetrack.com/technote/barcode-interpretation-definition/examples>

Last update: **2025/01/21 22:07**

