


# Barcode Definition Examples

For detailed information about Barcode Definitions and how to create/edit them see [Barcode Definitions](#).

## Barcode Pattern Definition ????.\*

? translates to a single character \* translates as a wild card and matches anything

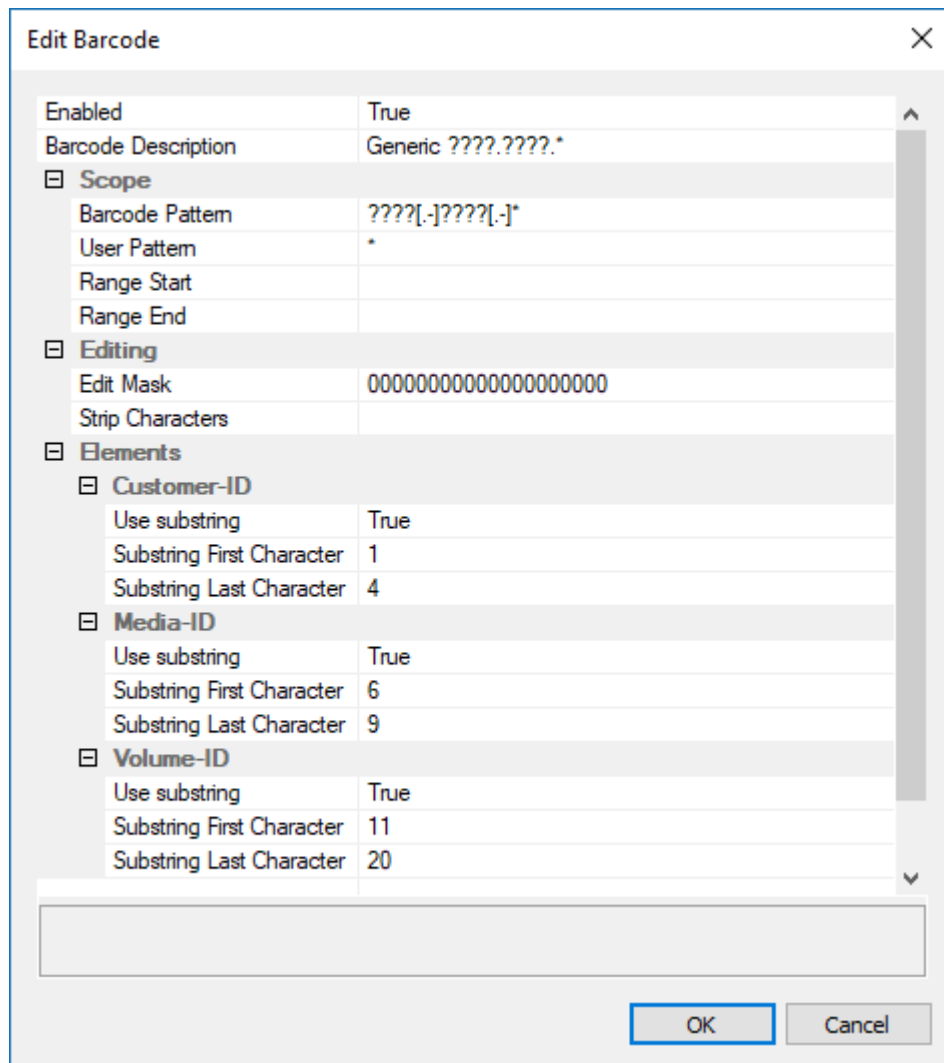

Barcode US01.CONT.CT100100

The filter will dissect the barcode to

- Customer-ID: US01
- Media-ID: CONT
- Volume-ID: CT100100

## Barcode Pattern Definition \*? ?\*

? translates to a single character \* translates as a wild card and matches anything

Property	Value
Enabled	True
Barcode Description	Space Barcode Hash
<b>Scope</b>	
Barcode Pattern	*? ?*
User Pattern	*
Range Start	
Range End	
<b>Editing</b>	
Edit Mask	00000000000000000000
Strip Characters	
<b>Elements</b>	
<b>Customer-ID</b>	
Use substring	False
Literal	
<b>Media-ID</b>	
Use substring	False
Literal	
<b>Volume-ID</b>	
Use substring	False
Literal	#

Volume-ID MONDAY WEEK ONE

The filter will hash the barcode to

- X-D8ED51DA

[technote](#), [barcode](#), [tapemaster](#)

From: <https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link: <https://rtfm.tapetrack.com/technote/barcode-interpretation-definition/examples?rev=1614211676>

Last update: **2025/01/21 22:07**

