

Removing Volume Indexes

When a program such as [TMSS10ImportFileDB](#) has been run against the Database, while the Volume table is updated, the alternative Indexes are not. This can result in the Customer Tree being out of sync with the Volumes.

To remedy this, deleting the Volume Alternative Indexes will cause them to be rebuilt with up-to-date information when the Server is restarted.

Windows Instructions


[Stop the Server.](#)



Make a backup of the TapeTrack\TapeTrack Framework Server\var directory and contents before making any alterations.

Navigate to the TapeTrack Database installation directory (default location = C:\Program Files\TapeTrack\TapeTrack Framework Server\var\db).

Delete all files with TMSS10Volume prefix (eg TMSS10.volume-cmserial, TMSS10.volume-container inclusive down to TMSS10.volume-synctime), but **DO NOT** delete the fileTMSS10Volume.

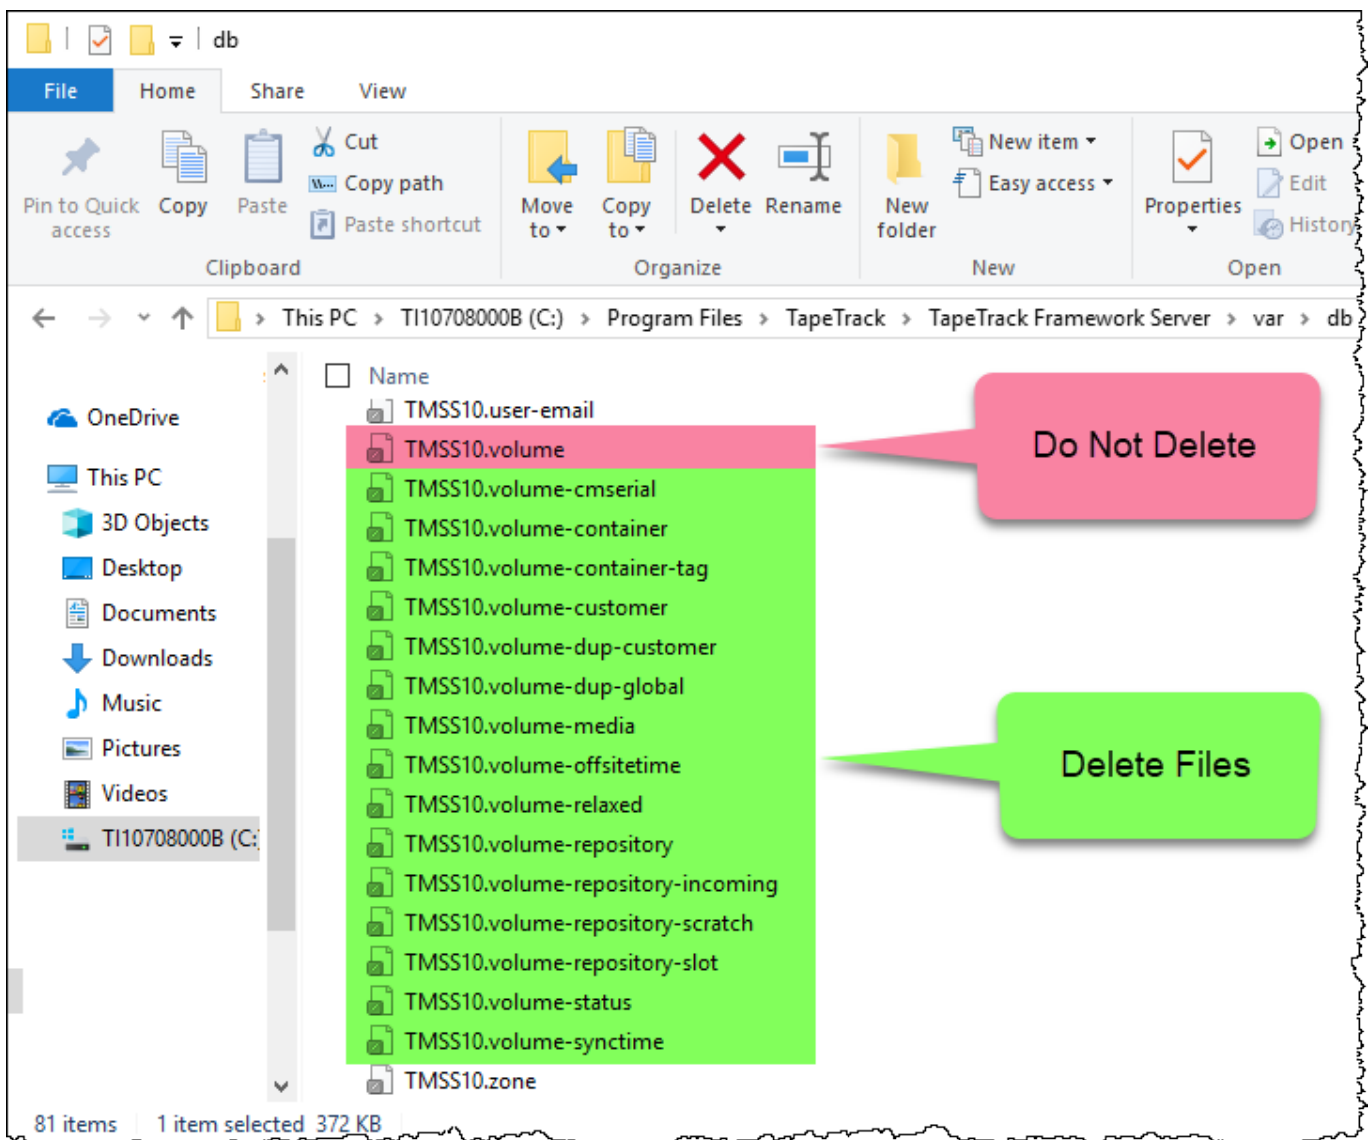

Restart the Server.

All Volume Alternative Indexes will now be rebuilt with up-to-date information.

[technote](#), [server](#), [database](#)

From: <https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link: https://rtfm.tapetrack.com/technote/clear_database/volume_index?rev=1621958008

Last update: **2025/01/21 22:07**

