

# GeoIP

When implemented, GeoIP will show the users country code from the active users window in TapeMaster.

To implement the GeoIP function, the file GeoIP.dat must be uploaded and a -g filepath/GeoIP.dat added to the Framework Server registry in windows, or tapetrack functions in Linux.


## Windows installation



[Backup Registry](#) before making any alterations.


Do not edit the registry unless you are competent to do so.

Once you have a current backup of the registry, navigate to Computer\HKEY\_LOCAL\_MACHINE\SYSTEM\ControlSet001\Services\TMSS10SVC in Registry Editor.

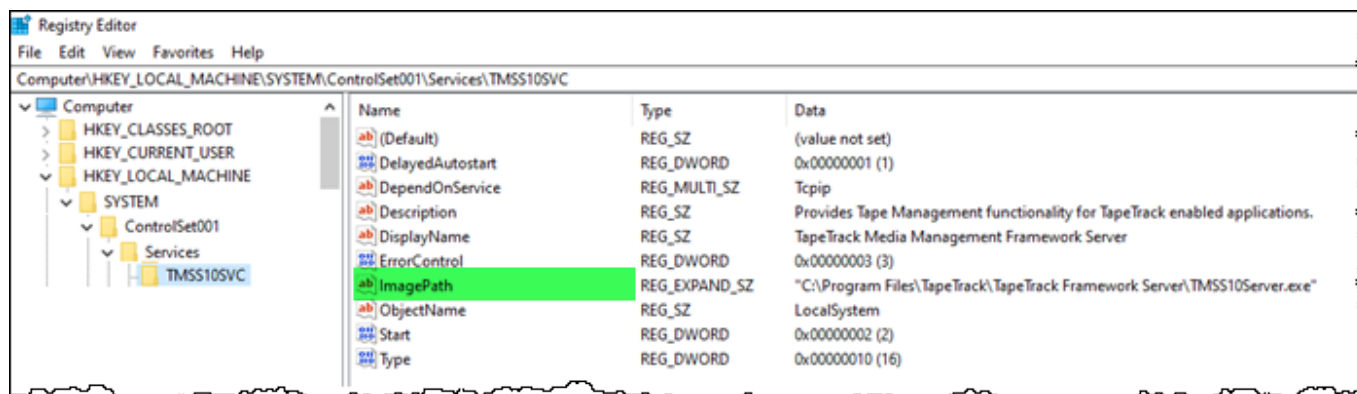

Double click on the Image Path to open up the Edit String window.

At the end of the Value data string, add -g filepath/GeoIP.dat at the end of the string.

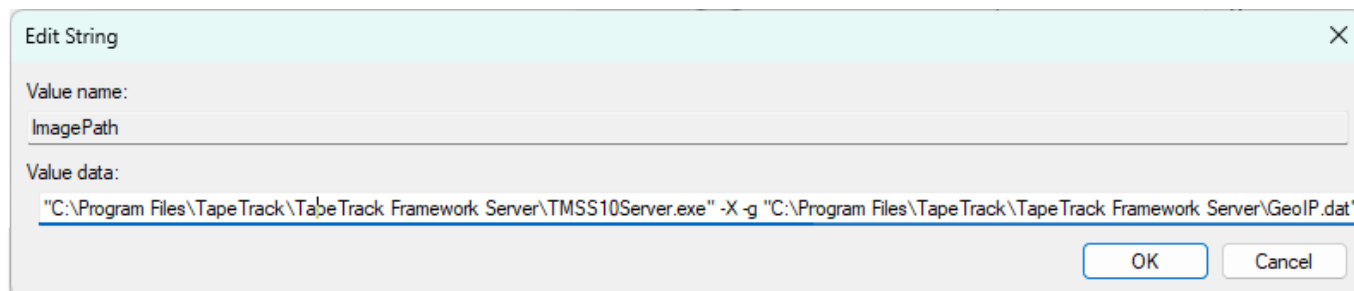

From:

<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://rtfm.tapetrack.com/technote/geqip?rev=1739510133>

Last update: **2025/02/14 05:15**

