


Restricting Which Volume-ID's Can Be Moved To A Repository.

TapeTrack allows the restriction of what volumes can be moved to a repository based on a pattern specified in the Repository properties.

Setting Volume-ID Restrictions

Open the required repository's properties and navigate to the Options tab.

Click in the field to the right of Allowable Volume-ID's and enter allowable volumes string pattern.

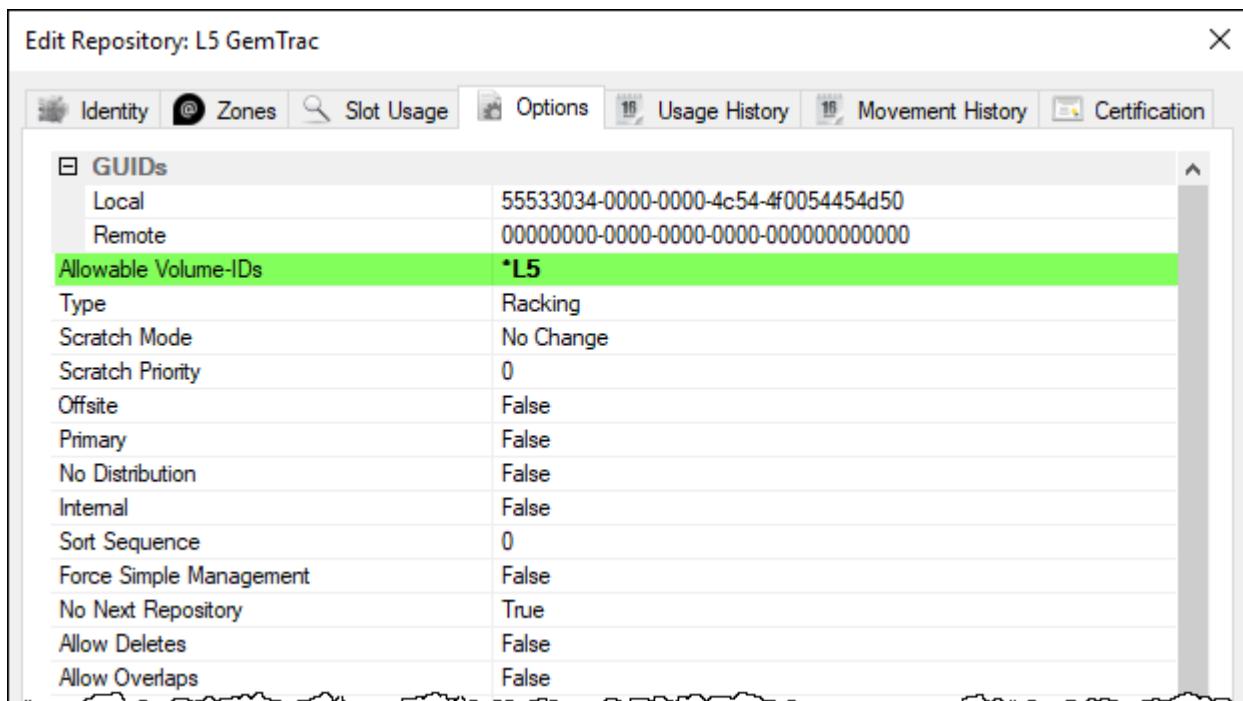

Allowable Volume-IDs	*L5
Type	Racking
Scratch Mode	No Change
Scratch Priority	0
Offsite	False
Primary	False
No Distribution	False
Internal	False
Sort Sequence	0
Force Simple Management	False
No Next Repository	True
Allow Deletes	False
Allow Overlaps	False

Restricting volume-ID patterns can be enforced using [TapeTrack string filters](#).

Character filters may be used alone or in combination to achieve the restricted volume-ID pattern required

From:
<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:
https://rtfm.tapetrack.com/technote/restricting_volumeid_by_repository?rev=1529547265

Last update: **2025/01/21 22:07**

