


# Restricting Which Volume-ID's Can Be Moved To A Repository.

TapeTrack allows the restriction of what volumes can be moved to a repository based on a pattern specified in the Repository properties.

## Setting Volume-ID Restrictions

Open the required repository's properties and navigate to the Options tab.

Click in the field to the right of Allowable Volume-ID's and enter allowable volumes string pattern.

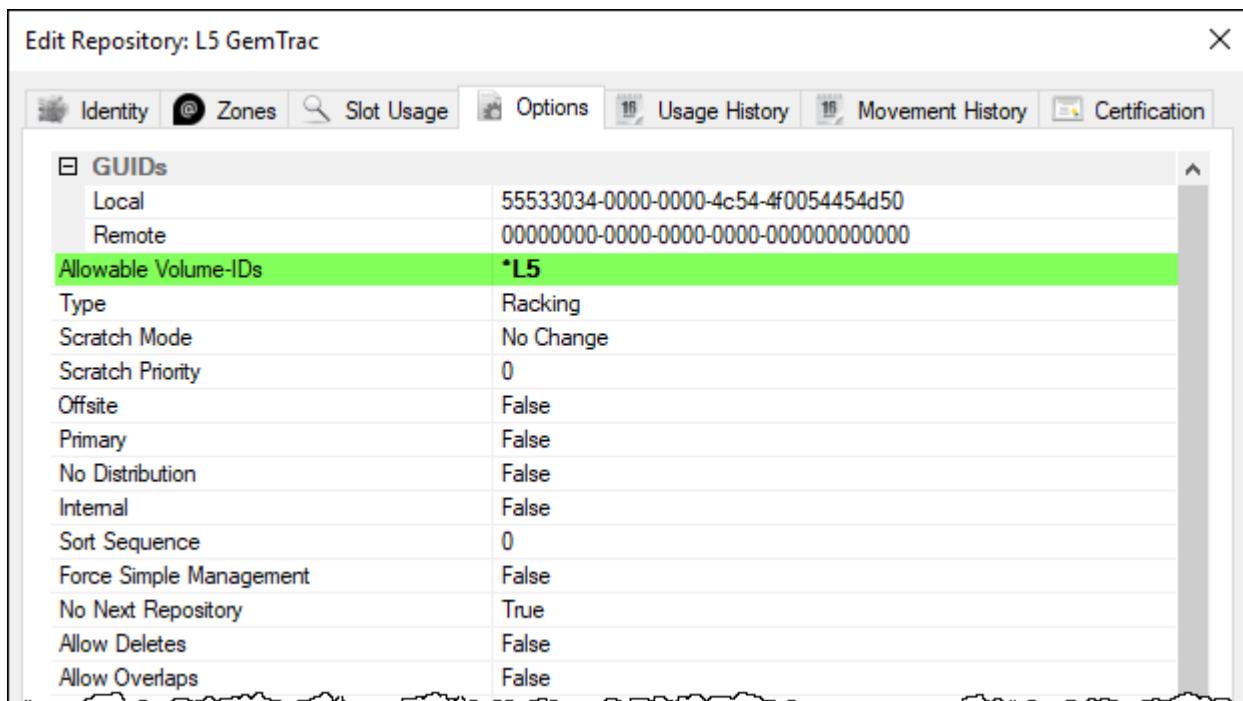

Restricting volume-ID patterns can be enforced using [TapeTrack string filters](#).

Character filters may be used alone or in combination to achieve the restricted volume-ID pattern required

## Example Patterns

Volume ID required	Filter Pattern	Example Volume-ID	
Only volumes ending in L5	*L5	100001L5	
Anything except volumes ending in L5	!*L5	100002L6	
Volumes ending in L5 or starting with X-	*(L5	X-*)	X-2E8CA12F

Last update: 2025/01/21 technote:restricting\_volumeid\_by\_repository https://rtfm.tapetrack.com/technote/restricting\_volumeid\_by\_repository?rev=1529548507  
22:07

From: <https://rtfm.tapetrack.com/> - **TapeTrack Documentation**



Permanent link:

[https://rtfm.tapetrack.com/technote/restricting\\_volumeid\\_by\\_repository?rev=1529548507](https://rtfm.tapetrack.com/technote/restricting_volumeid_by_repository?rev=1529548507)

Last update: **2025/01/21 22:07**