
## Restricting Which Volume-ID's Can Be Moved To A Repository.

TapeTrack allows the restriction of what volumes can be moved to a repository based on a pattern specified in the Repository properties.

## **Setting Volume-ID Restrictions**

Open the required repository's properties and navigate to the Options tab.

Click in the field to the right of Allowable Volume-ID's and enter allowable volumes string pattern.

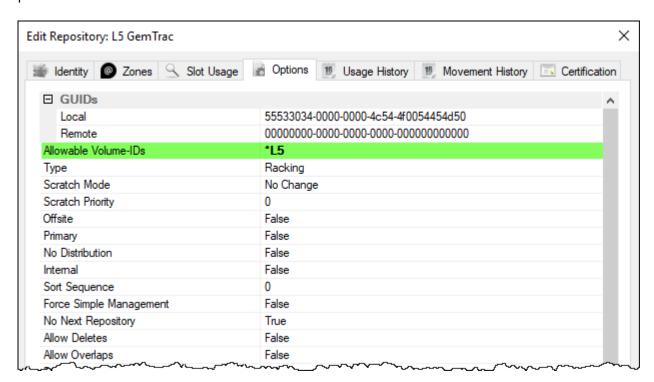

Restricting volume-ID patterns can be enforced using TapeTrack string filters.

Character filters may be used alone or in combination to achieve the restricted volume-ID pattern required

## **Example Patterns**

Volume ID required	Filter Pattern	<b>Example Volume-ID</b>
Only volumes ending in L5	*L5	100001L5
Anything except volumes ending in L5	!*L5	100002L6
Volumes ending in L5 or starting with X-	*(*L5 X-*)	X-2E8CA12F

update:
2025/01/21 technote:restricting\_volumeid\_by\_repository https://rtfm.tapetrack.com/technote/restricting\_volumeid\_by\_repository?rev=1529548541
22:07

From:

https://rtfm.tapetrack.com/ - TapeTrack Documentation

Permanent link:

https://rtfm.tapetrack.com/technote/restricting\_volumeid\_by\_repository?rev=1529548541

Last update: 2025/01/21 22:07



https://rtfm.tapetrack.com/ Printed on 2025/12/01 07:34