

# TMSSSLACKURL

The [Environmental Variable](#) TMSSSLACKURL sets the URL for a Slack message to be sent to detailing the result of a script running a command line executable on a remote server.

## Example

### Windows Command Line

```
set TMSSSLACKURL=https://hooks.slack.com/services/your_unique_address_values
```

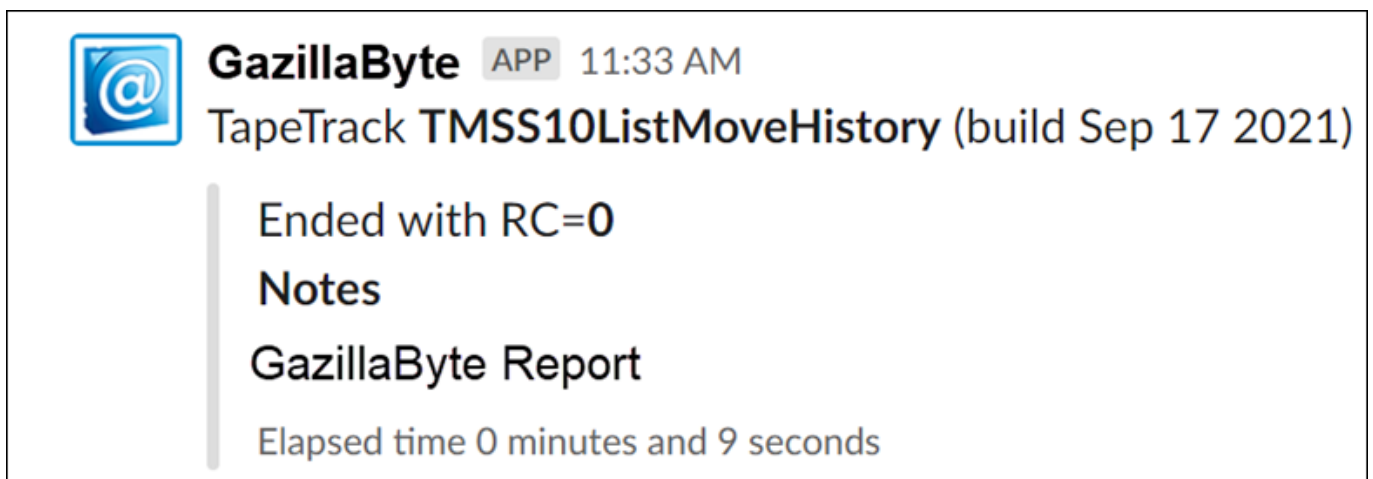
### Windows PowerShell


```
$env:TMSSSLACKURL =  
"https://hooks.slack.com/services/your_unique_address_values"
```

### Linux

```
export  
TMSSSLACKURL=https://hooks.slack.com/services/your_unique_address_value
```

## Sample Output

A screenshot of a Slack message from the 'GazillaByte' app, timestamped 11:33 AM. The message content is: 'TapeTrack TMSS10ListMoveHistory (build Sep 17 2021)' followed by a vertical bar separator and the text 'Ended with RC=0', 'Notes', 'GazillaByte Report', and 'Elapsed time 0 minutes and 9 seconds'.

 **GazillaByte** APP 11:33 AM  
TapeTrack TMSS10ListMoveHistory (build Sep 17 2021)  
Ended with RC=0  
Notes  
GazillaByte Report  
Elapsed time 0 minutes and 9 seconds

## See Also

[TMSSSLACKUSER](#)  
[TMSSSLACKICON](#)

[TMSSLACKONERROR](#)  
[TMSSLACKNOTES](#)

[Setting Environmental Variables](#)

[environmental variables](#), [paths](#), [slack](#)

From:  
<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:  
<https://rtfm.tapetrack.com/variable/tmsslackurl>

Last update: **2025/01/21 22:07**

