

# TMSSSLACKUSER

The [Environmental Variable](#) TMSSSLACKUSER allows you to add a user name or company description to the top of the Slack message to better differentiate the message origin if you have several different users set up.

## Example

### Windows Command Line

```
set TMSSSLACKUSER=GazillaByte
```


### Windows PowerShell

```
$env:TMSSSLACKUSER = "GazillaByte"
```

### Linux

```
export TMSSSLACKURL=GazillaByte
```

### Sample Output

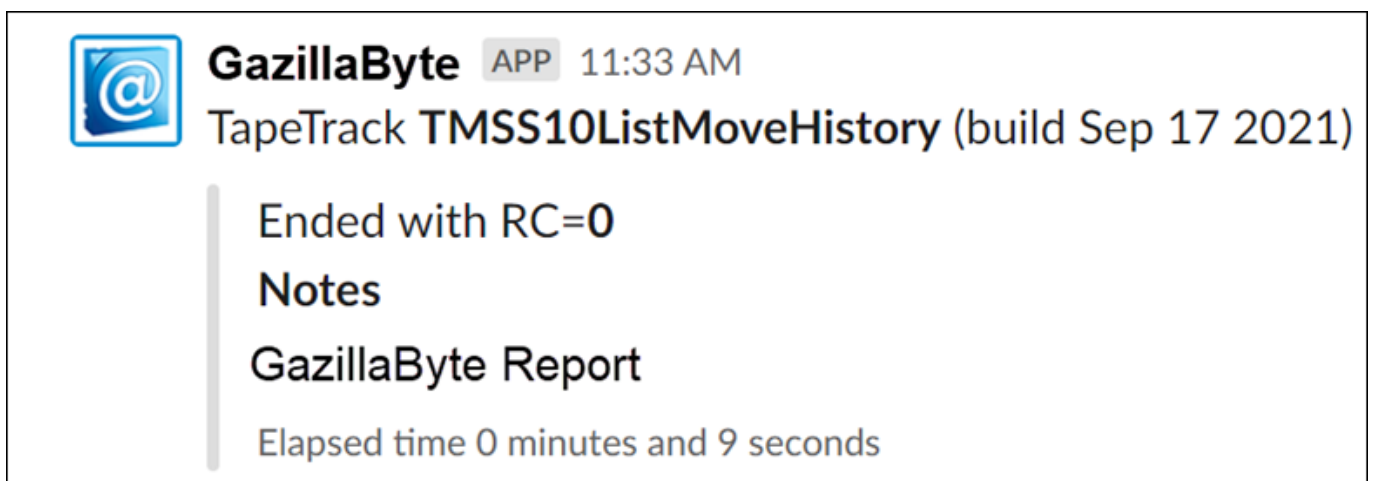

The screenshot shows a Slack message from an application named 'GazillaByte' at 11:33 AM. The message content is as follows:

**GazillaByte** APP 11:33 AM  
TapeTrack **TMSS10ListMoveHistory** (build Sep 17 2021)

Ended with RC=0

Notes

**GazillaByte Report**

Elapsed time 0 minutes and 9 seconds

## See Also

[TMSSSLACKURL](#)  
[TMSSSLACKICON](#)  
[TMSSSLACKONERROR](#)

## TMSSLACKNOTES

### Setting Environmental Variables

[environmental variables](#), [paths](#), [slack](#)

From:

<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://rtfm.tapetrack.com/variable/tmsslackuser>

Last update: **2025/01/21 22:07**

