

# TMSSLACKUSER

The [Environmental Variable](#) TMSSLACKUSER

## Example

### Windows Command Line

```
set TMSSLACKUSER=GazillaByte
```


### Windows PowerShell

```
$env:TMSSLACKUSER = "GazillaByte"
```

### Linux

```
export TMSSLACKUSER="GazillaByte"
```

### Sample Output

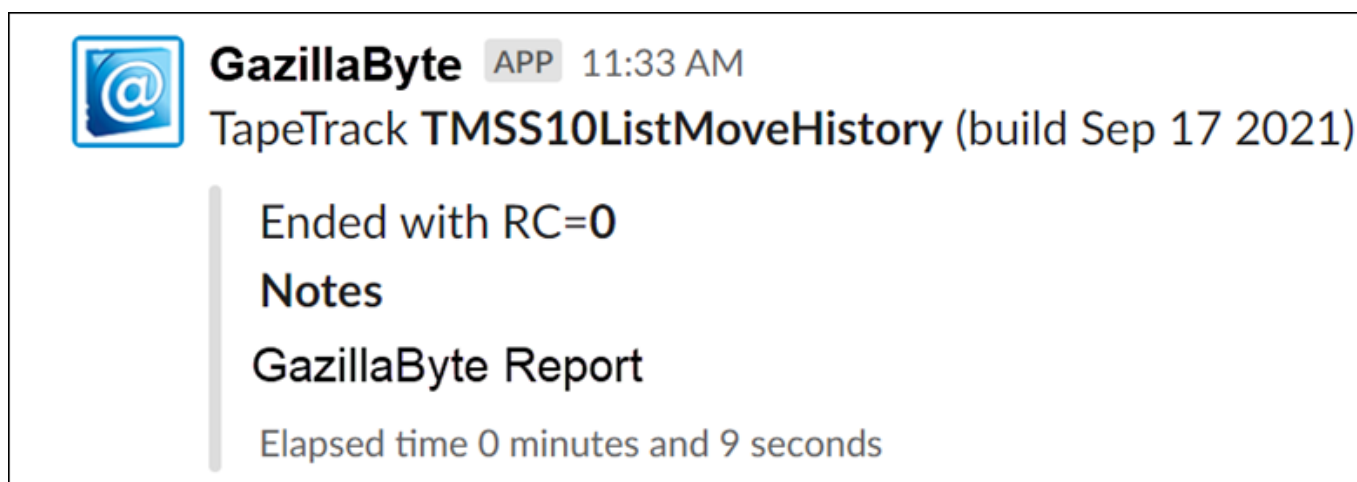

The screenshot shows a terminal window with a blue icon containing an '@' symbol. The title bar reads "GazillaByte APP 11:33 AM". The main content of the terminal is as follows:

```
TapeTrack TMSS10ListMoveHistory (build Sep 17 2021)
  Ended with RC=0
  Notes
  GazillaByte Report
  Elapsed time 0 minutes and 9 seconds
```

## See Also

[TMSSLACKURL](#)  
[TMSSLACKICON](#)  
[TMSSLACKONERROR](#)  
[TMSSLACKNOTES](#)

[Setting Environmental Variables](#)

[environmental variables](#), [paths](#)

From:

<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://rtfm.tapetrack.com/variable/tmssslackuser?rev=1631849378>

Last update: **2025/01/21 22:07**

