

TMSSSLACKUSER

The [Environmental Variable](#) TMSSSLACKUSER allows you to add a user name or company description to the top of the Slack message to better differentiate the message origin if you have several different users set up.

Example

Windows Command Line

```
set TMSSSLACKUSER=GazillaByte
```


Windows PowerShell

```
$env:TMSSSLACKUSER = "GazillaByte"
```

Linux

```
export TMSSSLACKURL=GazillaByte
```

Sample Output

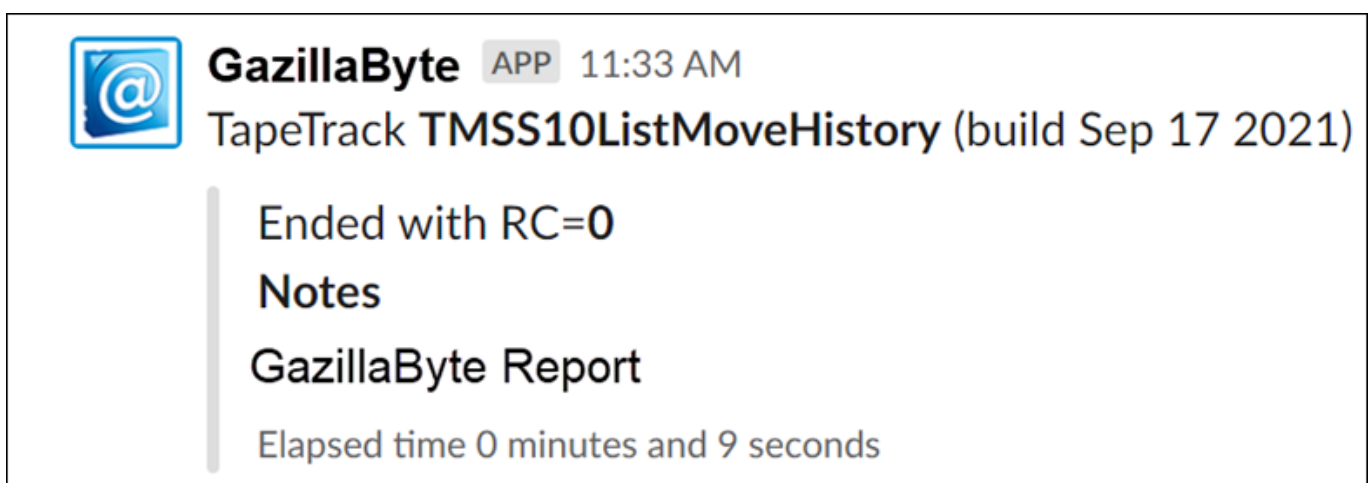

The screenshot shows a Slack message from an application named 'GazillaByte' at 11:33 AM. The message content is as follows:

```
GazillaByte APP 11:33 AM
TapeTrack TMSS10ListMoveHistory (build Sep 17 2021)
  Ended with RC=0
  Notes
  GazillaByte Report
  Elapsed time 0 minutes and 9 seconds
```

See Also

[TMSSSLACKURL](#)
[TMSSSLACKICON](#)
[TMSSSLACKONERROR](#)

TMSSLACKNOTES

Setting Environmental Variables

[environmental variables](#), [paths](#)

From:

<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://rtfm.tapetrack.com/variable/tmsslackuser?rev=1631849560>

Last update: **2025/01/21 22:07**

