

TMSSSLACKUSER

The [Environmental Variable](#) TMSSSLACKUSER allows you to add a user name or company description to the top of the Slack message to better differentiate the message origin if you have several different users set up.

Example

Windows Command Line

```
set TMSSSLACKUSER=GazillaByte
```


Windows PowerShell

```
$env:TMSSSLACKUSER = "GazillaByte"
```

Linux

```
export TMSSSLACKURL=GazillaByte
```

Sample Output

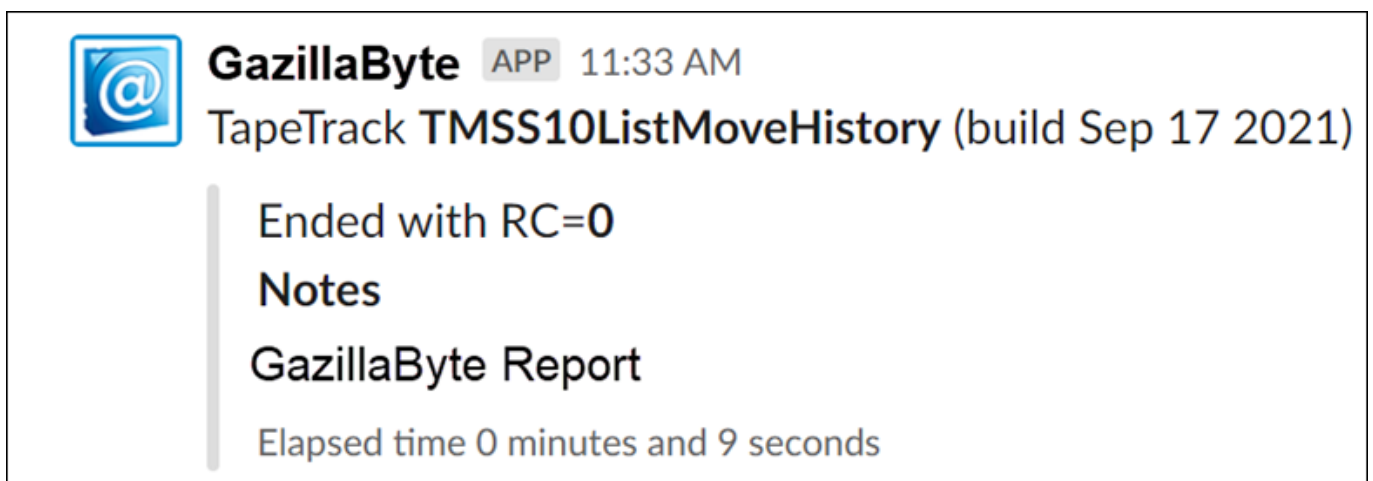

The screenshot shows a Slack message from the 'GazillaByte' app, timestamped at 11:33 AM. The message content includes the title 'TapeTrack TMSS10ListMoveHistory (build Sep 17 2021)', followed by 'Ended with RC=0', 'Notes', 'GazillaByte Report', and 'Elapsed time 0 minutes and 9 seconds'. A vertical bar is visible on the left side of the message content area.

See Also

[TMSSSLACKURL](#)
[TMSSSLACKICON](#)
[TMSSSLACKONERROR](#)

TMSSLACKNOTES

Setting Environmental Variables

[environmental variables](#), [paths](#), [slack](#)

From:

<https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://rtfm.tapetrack.com/variable/tmsslackuser?rev=1631850579>

Last update: **2025/01/21 22:07**

