

Adjusting Slot Allocation

From time to time you may need to adjust a [Customers Slot](#) allocation based on increased or decreased [Volume](#) numbers.

Increasing Slot Allocation

Slotting allocation can be increased by either adding extra [zones](#) to the [Repository](#), or by increasing the [Slot](#) allocation within the currently assigned [Zones](#).

See [Maintaining A Zone](#) to add or increase Zone allocation.

Decreasing Slot Allocation

Removing Empty Slots

Decreasing [Slot](#) allocation for a [Customer](#) can be as simple as reducing the [Slots](#) allocated through the [Slot Edit Range Information](#) window, as long as the [Slots](#) being removed are sequential, unoccupied and from the end of the last Zone allocated.

Removing Slot allocation using this method must be from the last allocated Zone (if multiple Zones are assigned) from the high end of the Zone. The reason for this is if there are three Zones allocated, each with 100 Slots, TapeTrack interprets these as one continual Slot arrangement, 1 to 100 in Zone 1, 101 to 200 in Zone 2 and 201 to 300 in Zone 3. Reducing the Slot allocation from 300 to 250 by removing the last 50 Slots from Zone 3 keeps all lower Slotted tapes in the same number Slot. So a tape in Slot 248 would still in the same place (Zone 3, 48th slot). If you were to remove the 50 Slots in Zone 2, Zone 1 would still be Slots 1 to 100, Zone 2 would now be Slots 101 to 150 and Zone 3 would be 151 to 250, essentially putting Slot 248 now in the 98th Slot in Zone 3. This would put all Volumes in Zone 3 out 50 Slots in allocation vs physical location.

Removing Occupied Slots


If the [Slots](#) to be removed from allocation are currently occupied, completely or partially, the [Volumes](#) will need to be reslotted before this can be accomplished.




You must have enough empty [Slots](#) under the highwater mark to accommodate any [Volumes](#) currently slotted above the mark.

To remove these [Volumes](#) from the occupied [Slots](#):


- Right click the required [Repository](#) and select [Properties](#), or double click the [Repository](#) , and click on the [Options](#) tab.

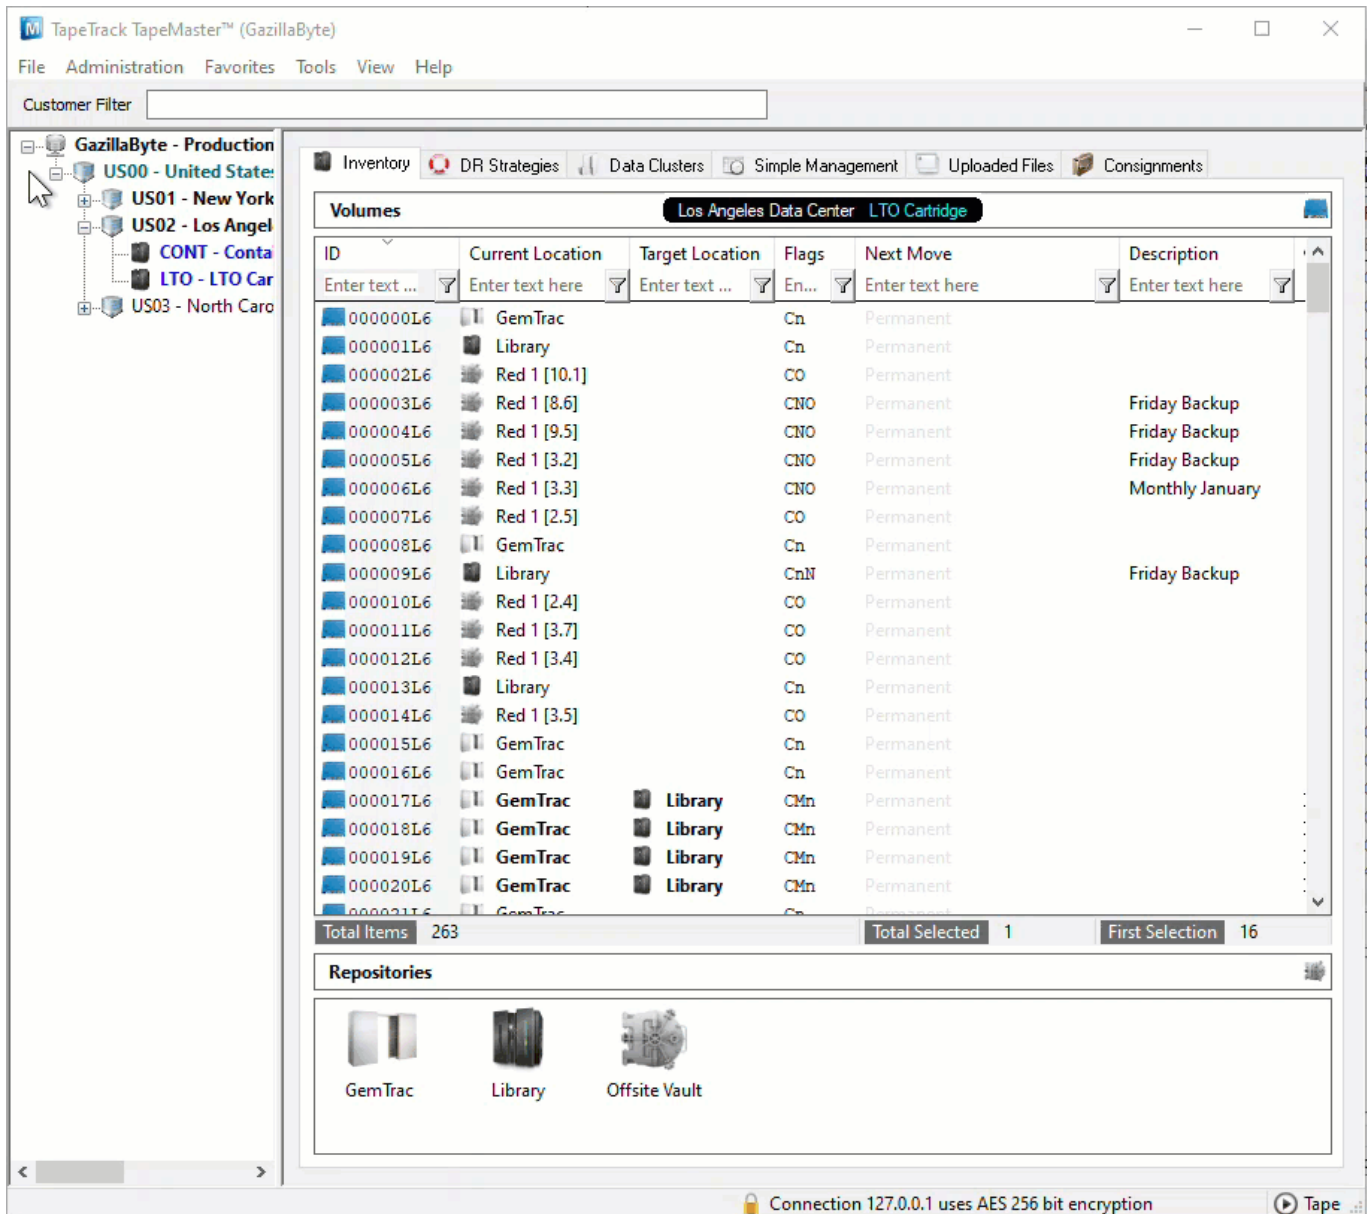

- Set Highwater Offset to the number you wish to lower Slot allocation by. For example if you currently have 3000 Slots allocated and wish to reduce the allocation to 1000 Slots set the highwater offset to 2000 (3000 - 2000).

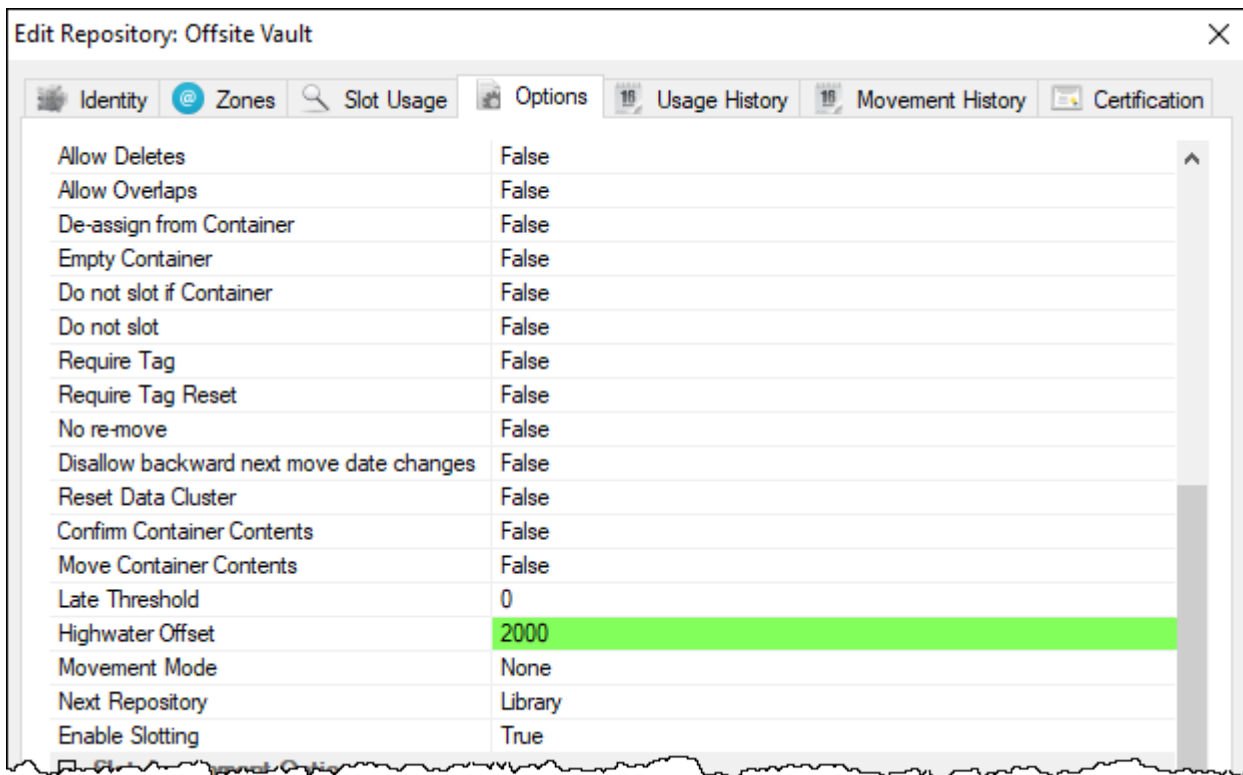

- Run the slotting program [TMSS10SlotAllocation](#) to re-slot any [Volumes](#) above the highwater mark.
- Decrease the [slot allocation](#).

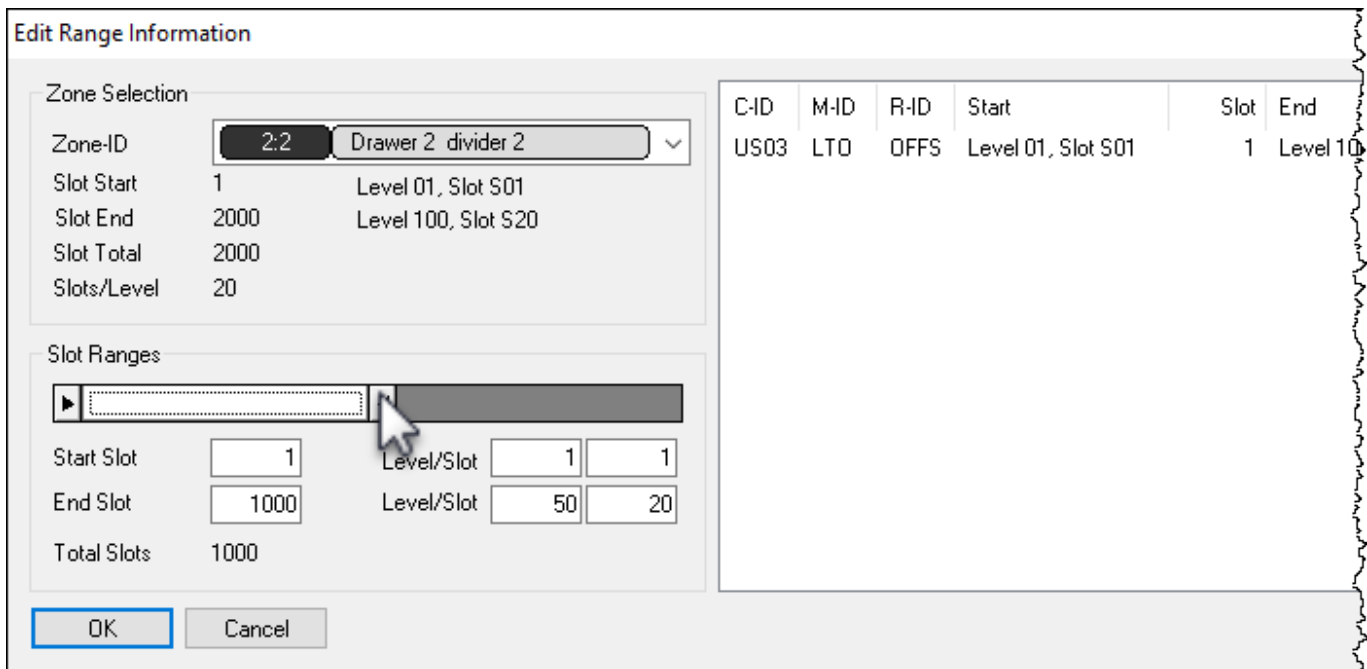

- Adjust the **Highwater Offset** back to zero to enable use of all allocated [Slots](#).

Edit Repository: Offsite Vault						
Identity	Zones	Slot Usage	Options	Usage History	Movement History	Certification
Allow Deletes			False			
Allow Overlaps			False			
De-assign from Container			False			
Empty Container			False			
Do not slot if Container			False			
Do not slot			False			
Require Tag			False			
Require Tag Reset			False			
No re-move			False			
Disallow backward next move date changes			False			
Reset Data Cluster			False			
Confirm Container Contents			False			
Move Container Contents			False			
Late Threshold			0			
Highwater Offset			0			
Movement Mode			None			
Next Repository			Library			
Enable Slotting			True			

From: <https://rtfm.tapetrack.com/> - **TapeTrack Documentation**

Permanent link: https://rtfm.tapetrack.com/master/adjusting_slot_allocation?rev=1638837305

Last update: **2025/01/21 22:07**

